



FELT HISTORY

Felt Bicycles was founded on one principle: to design, develop and deliver the best bicycles in the world. Before starting his namesake company, and in addition to being an accomplished triathlete, Jim Felt was one of the top motorcycle mechanics in the world after having worked with industry leaders Honda, Suzuki, Yamaha and Kawasaki. When motocross champion and fitness guru Johnny O'Mara asked Felt to build him a triathlon bike, Felt was given the opportunity to put into practice many of the innovative designs he had dreamed about for optimizing rider position, handling and aerodynamics.

His work was so innovative that Easton Sports hired Felt as the company's product engineer and tasked him with creating an all-new bike for three-time Ironman World Champion Paula Newby-Fraser. Shortly after, she became four-time champion of the most prestigious race in triathlon. Jim Felt then launched his namesake brand, Felt Bicycles, and utilized his frame-building expertise to develop a complete line of road and time trial bikes. After partnering with bicycle industry veterans Bill Duehring and Michael Müllmann in 2001, Jim Felt was able to reach an even greater number of cycling enthusiasts than ever before by expanding into the realms of BMX, lifestyle, track racing and mountain bikes.


Each and every Felt bicycle features unique and innovative technologies that set it apart from its competitors, all in the name of Felt's original guiding principle. And with countless new and exciting projects on the horizon, that principle remains the same to this day and well into the future: to design, develop and deliver the greatest bicycles in the world.


ATHLETE-INSPIRED, TECHNOLOGY-DRIVEN

At Felt Bicycles, we are passionate about road cycling in all its forms, and we are dedicated to racing. Felt road, triathlon and track bikes have guided the world's elite professional athletes to grand tour stage wins, world championships, Olympic gold medals, national titles, as well as the most dedicated enthusiast riders to countless amateur victories. And because of this relationship with the most committed athletes on earth, Felt Bicycles is able to utilize the knowledge gleaned from years of experience at the top level of the sport to develop revolutionary technologies to enhance the ride of all cyclists. Whether it's empowering riders to achieve their fitness goals, improve the quality of their commute or increase the thrill and satisfaction of a leisurely ride with friends, Felt's driving force is a commitment to racing-derived innovation.

Innovative manufacturing processes like InsideOut and MMC (Modular Monocoque Construction) reduce the weight and increase the durability of Felt's advanced performance road bikes, many of which feature the groundbreaking TeXtreme carbon fiber that further enhances their performance characteristics. Felt engineers utilize the latest technology, including CFD (Computational Fluid Dynamics) software and FEA (Finite Element Analysis) in order to maximize the balance of each and every road bike's pedaling stiffness and vertical compliance. And Felt's wind tunnel testing protocols are among the most advanced in the industry, which means that Felt performance road bikes outperform the competition both inside the lab and out on the road.

All of these efforts embody Felt's commitment to create the best road bikes on the planet. And with one of the greatest things about road cycling being the variety of roads to explore, whether they are well traveled or off the beaten path, Felt Bicycles provides the perfect bike for each and every road enthusiast.

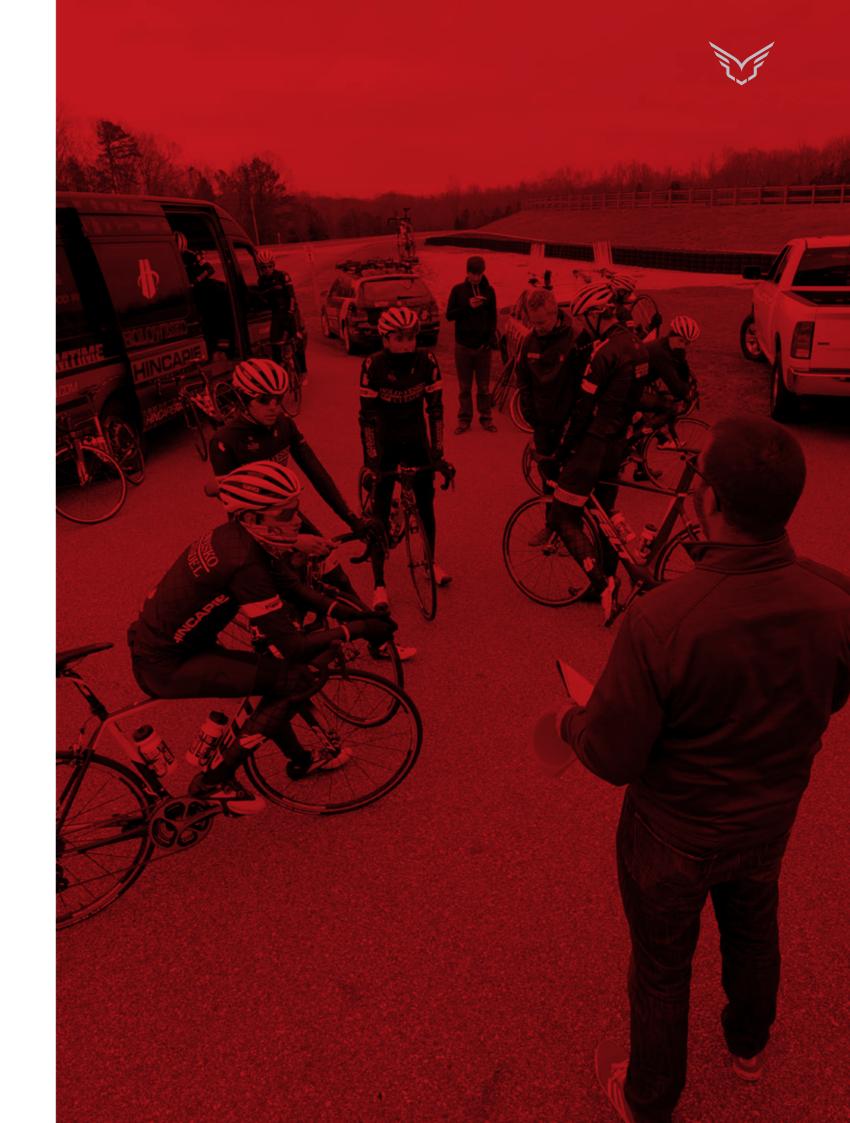

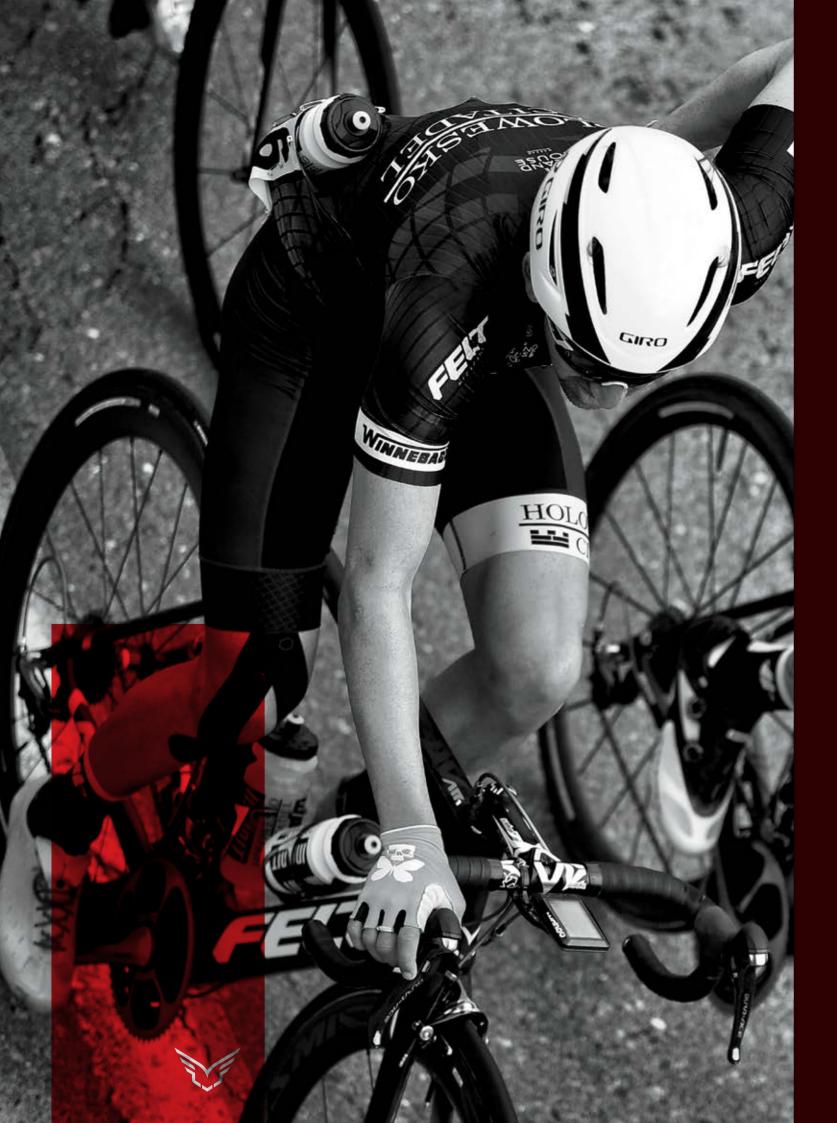

AR SERIES

Felt's pro road racers demanded the fastest bike imaginable for breakaways, sprint finishes and criteriums. So Felt's engineers set to work using computational fluid dynamics (CFD) software and the most stringent wind tunnel testing protocols in the industry. The result of their efforts is the AR, the most aerodynamic road frame that Felt Bicycles has ever produced. But because aerodynamics are only part of the racing equation, the AR was designed with a tapered steerer for optimal handling in any situation, along with maximum pedaling stiffness that's balanced with a ride quality tuned to minimize rider fatigue. The AR also features a unique, versatile seatpost that can be reversed to give triathletes the optimal, aero position. In an era obsessed with pursuing marginal gains at the expense of stiffness or handling, the AR makes zero compromises and is the best-performing aero road bike in the world.

ARFRD AR2



FINISH

Matte TeXtreme (White)

FRAME Felt Aero Road UHC Ultimate + TeXtreme carbon fiber, MMC with InsideOut construction, carbon fiber BB30 bottom bracket shell and carbon fiber dropouts, 7075 CNC aluminum replaceable rear derailleur hanger, internal electronic-specific cable routing

FORK Felt Aero Road UHC Ultimate + TeXtreme carbon fiber monocoque construction, AeroTaper 1.125" - 1.25" carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with SL Ceramic, aluminum cased ACB upper and lower bearings, carbon fiber headset spacers, No.44/CF-R, 1.125" - 1.25"

STEM Easton EC90 ±10° rise, Ø31.8mm, 48cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Easton EC90 Aero, 80mm reach, 125mm drop, Ø31.8mm, 48 - 54cm: 400mm, 56 - 61cm: 420mm

GRIPS Felt VelvetGel tape with 3M reflective base with Felt Bubble-Tech F-Wing bar end plugs

SIZES

48, 51, 54, 56, 58, 61cm

SHIFTERS Shimano Dura-Ace R9150 Di2 11-speed with secondary sprint shifters

FRONT DERAILLEUR Shimano Dura-Ace R9150 Di2

REAR DERAILLEUR Shimano Dura-Ace R9150 Di2

CRANKSET Shimano Dura-Ace R9100, 52/36T, 48cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET CeramicSpeed BB30 Outboard with 24mm bearings

CHAIN Shimano Dura-Ace 11-speed

FREEWHEEL/CASSETTE Shimano Dura-Ace 11-speed, 11-28T

BRAKE LEVERS Shimano Dura-Ace R9150

FRONT BRAKE eecycleworks regular eebrake with Zipp brake pads for carbon rims

REAR BRAKE eecycleworks DM eebrake with Zipp brake pads for carbon rims

WEIGHT

14.6lbs, 6.6Kg



SADDLE Fizik Arione 00

SEATPOST Felt Vibration Reducing Aero Road flip position UHC Advanced + TeXtreme carbon fiber with 3T DiffLock Comfort Module internals, 48 - 51cm: 280mm length, 5mm offset, Felt VariMount Aero Road flip position UHC Advanced + TeXtreme carbon fiber, 54 - 61cm: 350mm length, 25mm offset

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts

RIMS/WHEELSET Zipp 404 NSW carbon

FRONT HUB Zipp Cognition, 100mm QR

REAR HUB Zipp Cognition, 11-speed, 130mm QR

SPOKES CX-Ray - Black

TIRES Continental Grand Prix 4000 S II folding, 700 x 23c

ACCESSORIES Carbon assembly paste, chain plate protector, valve extenders, aero seat post slot covers, Di2 internal battery charging cables



FINISH
White (TeXtreme)

FRAME Felt Aero Road UHC Advanced + TeXtreme

carbon fiber, MMC with InsideOut construction, BB30 bottom bracket shell and carbon fiber dropouts, 7075 CNC aluminum replaceable rear derailleur hanger, internal electronic-specific cable routing

FORK Felt Aero Road UHC Ultimate +
TeXtreme carbon fiber monocoque construction,
AeroTaper 1.125" - 1.25" carbon fiber steerer tube,
integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), No. 382/DJ, 1.125" - 1.25"

STEM Easton EC70 ±6° rise, Ø31.8mm, 48cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm. 61cm: 120mm

HANDLEBAR Easton EC70 Aero, 80mm reach, 125mm drop, Ø31.8mm, 48 - 54cm: 400mm, 56 - 61cm: 420mm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SIZES

48, 51, 54, 56, 58, 61cm

SHIFTERS Shimano Ultegra R8050 Di2 11-speed
FRONT DERAILLEUR Shimano Ultegra R8050 Di2

REAR DERAILLEUR Shimano Ultegra R8050 Di2 11-speed short cage

CRANKSET Shimano Ultegra R8000, 52/36T, 48cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Token BB30 with 24mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed,

BRAKE LEVERS Shimano Ultegra R8050

FRONT BRAKE Shimano Ultegra R8000 dual pivot caliper with brake pads for carbon rims

REAR BRAKE Shimano Ultegra R8000 direct mount caliper with brake pads for carbon rims

16.2lbs, 7.4Kg

titanium bolts

SADDLE Fizik Arione R3

WEIGHT

SEATPOST Felt Vibration Reducing Aero Road flip position UHC Advanced + TeXtreme carbon fiber with 3T DiffLock Comfort Module internals, 48 - 51cm: 280mm length, 5mm offset,

54 - 61cm: 350mm length, 25mm offset

SEATPOST CLAMP Felt Internaloc integrated with

RIMS/WHEELSET DT Swiss ARC1400 carbon, tubeless ready, 17mm inner width, 62.5mm depth; 1650g (wheelset)

FRONT HUB DT Swiss 240 Spline, 100mm QR

REAR HUB DT Swiss 240 Spline, 11-speed, 130mm QR

SPOKES DT Swiss Aerocomp 2.0/1.25/2.3 Bladed

TIRES Continental Grand Prix 4000 S II folding, $700 \times 23c$

ACCESSORIES Carbon assembly paste, chain plate protector, valve extenders, aero seat post slot covers, Di2 internal battery charging cables

AR3 AR4



FINISH

Matte Carbon (Cyan, Magenta)

FRAME Felt Aero Road UHC Performance carbon fiber, MMC with InsideOut construction, BSA threaded bottom bracket shell, carbon fiber dropouts, replaceable rear derailleur hanger, internal mechanical or internal electronic cable routing

FORK Felt Aero Road UHC Advanced carbon fiber monocoque construction, AeroTaper 1.125" - 1.25" carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), No. 382/DJ, 1.125" - 1.25"

STEM Easton EC70 ±6° rise, Ø31.8mm, 48cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Easton EC70 Aero, 80mm reach, 125mm drop, Ø31.8mm, 48 - 54cm: 400mm, 56 - 61cm: 420mm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

48, 51, 54, 56, 58, 61cm

WEIGHT

16.9lbs. 7.7Ka



SHIFTERS Shimano Ultegra R8000 11-speed

FRONT DERAILLEUR Shimano Ultegra R8000

REAR DERAILLEUR Shimano Ultegra R8000 11-speed short cage

CRANKSET Shimano Ultegra R8000, 52/36T, 48cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Shimano Hollowtech BSA threaded

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano Ultegra R8000

FRONT BRAKE Shimano Ultegra R8000 dual pivot caliper with brake pads for carbon rims

REAR BRAKE Shimano Ultegra R8000 direct mount caliper with brake pads for carbon rims

SADDLE Fizik Arione R5

SEATPOST Felt Vibration Reducing Aero Road flip position UHC Advanced carbon fiber with 3T DiffLock Comfort Module internals, 48 - 51cm; 280mm length, 5mm offset, 54 - 61cm: 350mm length, 25mm offset

SEATPOST CLAMP Felt Internaloc integrated with

RIMS/WHEELSET Devox 55 carbon, tubeless ready, 17mm inner width, 55mm depth

FRONT HUB Devox ARH1, sealed cartridge bearing, 100mm OR 20H

REAR HUB Devox ARH1, sealed cartridge bearing, 11-speed, 130mm QR, 24H

SPOKES 2.0mm stainless steel with aluminum

TIRES Continental Grand Prix 4000 S II folding, 700 x 23c

ACCESSORIES Carbon assembly paste, chain plate protector, valve extenders, aero seat post slot covers



FINISH

Matte Carbon (Acid Green)

FRAME Felt Aero Road UHC Performance carbon fiber, MMC with InsideOut construction. BSA threaded bottom bracket shell, carbon fiber dropouts, replaceable rear derailleur hanger, internal mechanical or internal electronic cable routing

FORK Felt Aero Road UHC Advanced carbon fiber monocoque construction, AeroTaper 1.125" - 1.25" carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), No. 382/DJ, 1.125" - 1.25"

STEM Devox, ±7° rise, Ø31.8mm, 48cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Devox Aero Road VariableShape, 80mm reach, 130mm drop, Ø31.8mm, 48 - 54cm: 400mm, 56 - 61cm: 420mm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

48, 51, 54, 56, 58, 61cm

SHIFTERS Shimano Ultegra R8000 11-speed

FRONT DERAILLEUR Shimano Ultegra R8000

REAR DERAILLEUR Shimano Ultegra R8000 11-speed short cage

CRANKSET Shimano RS500, 52/36T, 48cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Shimano Hollowtech BSA threaded

CHAIN KMC X-11, 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano Ultegra R8000

FRONT BRAKE Tektro Quartz T741 dual pivot caliper

REAR BRAKE TRP T851 direct mount caliper

SADDLE Fizik Arione R5

WEIGHT 17.5lbs. 8.0Ka

SEATPOST Felt Vibration Reducing Aero Road flip position UHC Advanced carbon fiber with 3T DiffLock Comfort Module internals, 48 - 51cm: 280mm length, 5mm offset, 54 - 61cm: 350mm length, 25mm offset

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts

RIMS/WHEELSET Devox 30; front: 17mm inner width, 27mm depth, rear: 17mm inner width, 30mm depth

FRONT HUB Devox ARH2, sealed cartridge bearing, 100mm QR, 24H

REAR HUB Devox ARH2, sealed cartridge bearing, 11-speed, 130mm QR, 28H

SPOKES 2.0 / 1.5 x 2.3mm butted aero stainless steel with aluminum nipples

TIRES Grand Sport Race folding, 700 x 23c

ACCESSORIES Carbon assembly paste, chain plate protector, valve extenders, aero seat post slot covers



AR5 ARFRD Frameset



FINISH

Matte Carbon (Black)

FRAME Felt Aero Road UHC Performance carbon fiber, MMC with InsideOut construction, BSA threaded bottom bracket shell, carbon fiber dropouts, replaceable rear derailleur hanger, internal mechanical or internal electronic cable routing

FORK Felt Aero Road UHC Advanced carbon fiber monocoque construction, AeroTaper 1.125" - 1.25" carbon fiber steerer tube with integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), No. 382/DJ, 1.125" - 1.25"

STEM Devox, ±7° rise, Ø31.8mm, 48cm: 80mm --- 51cm: 90mm --- 54 - 56cm: 100mm --- 58cm: 110mm --- 61cm: 120mm

HANDLEBAR Devox Aero Road VariableShape, 80mm reach, 130mm drop, Ø31.8mm, 48 - 54cm: 400mm --- 56 - 61cm: 420mm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano 105 11-speed

FRONT DERAILLEUR Shimano 105 braze-on

SIZES

48, 51, 54, 56, 58, 61cm

17.8lbs, 8.1Kgs

WEIGHT

RIMS/WHEELSET Devox 30; front: 17mm inner width, 27mm depth, --- rear: 17mm inner width, 30mm depth

FRONT HUB Devox ARH2, sealed cartridge bearing, 100mm QR, 24H

REAR HUB Devox ARH2, sealed cartridge bearing, 11-speed, 130mm QR, 28H

SPOKES 2.0 / 1.5 x 2.3mm butted aero stainless steel with aluminum nipples

TIRES Grand Sport Race folding, 700 x 23c

ACCESSORIES Carbon assembly paste, chain plate protector, aero seat post slot covers

REAR DERAILLEUR Shimano 105 11-speed short

CRANKSET Shimano 105, 52/36T, 48cm: 165mm -- 51cm: 170mm --- 54 - 56cm: 172.5mm --- 58 - 61cm: 175mm

BOTTOM BRACKET Shimano Hollowtech BSA threaded

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano 105

FRONT BRAKE Shimano 105 dual pivot caliper

REAR BRAKE Shimano 105 direct mount caliper

SADDLE Fizik Arione R7

SEATPOST Felt Vibration Reducing Aero Road flip position UHC Advanced carbon fiber with 3T DiffLock Comfort Module internals, 48 - 51cm: 280mm length, 5mm offset --- 54 - 61cm: 350mm length, 25mm offset

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts





Matte Metallic Charcoal Frost (TeXtreme)

SIZES

48, 51, 54, 56, 58, 61cm

WEIGHT 3.6lbs, 1.6Kg



FRAME Felt Aero Road UHC Ultimate + TeXtreme carbon fiber, MMC with InsideOut construction, BB30 bottom bracket shell and carbon fiber dropouts, 7075 CNC aluminum replaceable rear derailleur hanger, internal mechanical or internal electronic cable routing

FORK Felt Aero Road UHC Ultimate + TeXtreme carbon fiber monocoque construction, AeroTaper 1.125" - 1.25" carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), No. 382/DJ, 1.125" - 1.25"

SEATPOST Felt Vibration Reducing Aero Road flip position UHC Advanced + TeXtreme carbon fiber with 3T DiffLock Comfort Module internals, 48 - 51cm: 280mm length, 5mm offset, 54 - 61cm: 350mm length, 25mm offset

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts

ACCESSORIES Carbon assembly paste, chain plate protector, FSA headset, seat postaero seat post slot covers



FINISH

Matte Metallic Charcoal Frost (TeXtreme)

SIZES 48, 51, 54, 56, 58, 61cm

WEIGHT 3.8lbs, 1.7Kg



FRAME Felt Aero Road UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, BB30 bottom bracket shell and carbon fiber dropouts, 7075 CNC aluminum replaceable rear derailleur hanger, internal mechanical or internal electronic cable routing

FORK Felt Aero Road UHC Ultimate + TeXtreme carbon fiber monocoque construction, AeroTaper 1.125" - 1.25" carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), No. 382/DJ, 1.125" - 1.25"

SEATPOST Felt Vibration Reducing Aero Road flip position UHC Advanced + TeXtreme carbon fiber with 3T DiffLock Comfort Module internals, 48 - 51cm: 280mm length, 5mm offset, 54 - 61cm: 350mm length, 25mm offset

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts

ACCESSORIES Carbon assembly paste, chain plate protector, FSA headset, seat postaero seat post slot covers



FR SERIES

The FR is the epitome of the modern road race bike. Featuring a refined version of Felt's legendary racing geometry that boasts impeccable handling characteristics, the FR also utilizes a precise level of compliance that ensures riders are fresh for a finish line sprint after a long day in the saddle. The FR also showcases several integration features that have been optimized for contemporary drivetrains and components, including an intuitive cable management system that complements the unique properties of wireless and wired electronic groups while maximizing the utility of mechanical drivetrains. The FR also allows riders to utilize tires up to size 28mm on select rims, and is available in both rim brake- and disc brake-equipped versions. This gives Felt racers more equipment choices than ever before.



FR2 Disc (eTap)



FINISH
White (TeXtreme)

FRAME Felt Race Road UHC Advanced +
TeXtreme carbon fiber, MMC with InsideOut
construction, carbon fiber BB386 bottom bracket
shell, carbon fiber dropouts, CNC aluminum
replaceable rear derailleur hanger, external
mechanical or internal electronic cable routing

FORK Felt Race Road UHC Ultimate + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts, integrated compression device

HEADSET FSA integrated sealed cartridge bearing with carbon fiber cone spacer, Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

STEM 3T ARX II Team Stealth, ±6° rise, Ø31.8mm, 43cm: 80mm, 47 - 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR 3T Ergosum Team Stealth carbon fiber, 89mm reach, 128mm drop, Ø31.8mm, 43 - 51cm: 400mm*, 54 - 56cm: 420mm, 58 - 61cm: 440mm, *Note - ErnovaTeam Stealth for 43 - 51cm size

SIZES 43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano Dura-Ace R9100 11-speed

FRONT DERAILLEUR Shimano Dura-Ace R9100 braze-on

REAR DERAILLEUR Shimano Dura-Ace R9100 11-speed

CRANKSET Shimano Dura-Ace R9100, 52/36T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Token BB386 with 24mm bearings

CHAIN Shimano Ultegra 11-speed

FREEWHEEL/CASSETTE Shimano Ultegra 11-speed, 11-28T

BRAKE LEVERS Shimano Dura-Ace R9100

FRONT BRAKE Shimano Dura-Ace R9100 dual pivot caliper with brake pads for carbon rims

WEIGHT 14.8lbs. 6.7Ka

REAR BRAKE Shimano Dura-Ace R9100 direct mount caliper with brake pads for carbon rims

SADDLE Prologo Nago Evo PAS CPC TiRox

SEATPOST 3T Zero 25 Team Stealth, Ø27.2mm x 350mm length

SEATPOST CLAMP 7075 CNC aluminum, titanium bolt and scandium nut, Ø30.6mm

RIMS/WHEELSET MAVIC Ksyrium Pro Carbon SL C

FRONT HUB MAVIC Ksyrium Pro, 100mm QR

REAR HUB MAVIC Ksyrium Pro, 11-speed, 130mm QR

TIRES MAVIC Yksion Pro GripLink folding (front) and PowerLink folding (rear), 700 x 25c

ACCESSORIES Carbon assembly paste, chain plate protector



FINISH

Black (TeXtreme, Acid Green)

FRAME Felt Race Road UHC Advanced +
TeXtreme carbon fiber, MMC with InsideOut
construction, carbon fiber BB386 bottom bracket
shell, 12 x 142mm Syntace style thru axle,
flat mount disc brake standard, CNC aluminum
replaceable rear derailleur hanger, external
mechanical or internal electronic cable routing

FORK Felt Race Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

STEM 3T ARX II Team Stealth, ±6° rise, Ø31.8mm, 43cm: 80mm, 47 - 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR 3T Ergosum Team Stealth carbon fiber, 89mm reach, 128mm drop, Ø31.8mm, 43 - 51cm: 400mm*, 54 - 56cm: 420mm, 58 - 61cm: 440mm, *Note - ErnovaTeam Stealth for 43 - 51cm size SIZES

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS SRAM RED eTap HRD 11-speed wireless

FRONT DERAILLEUR SRAM RED eTap braze-on

REAR DERAILLEUR SRAM RED eTap 11-speed

CRANKSET Quarq Prime Carbon, 52/36T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Token BB386 with 22/24mm bearings

CHAIN SRAM 11-speed

FREEWHEEL/CASSETTE SRAM 11-speed,

BRAKE LEVERS SRAM RED eTap HRD, hydraulic

FRONT BRAKE SRAM RED eTap HRD hydraulic disc with 160mm rotor

REAR BRAKE SRAM RED eTap HRD hydraulic disc with 160mm rotor WEIGHT TBA

SADDLE Prologo Nago Evo PAS TiRox

SEATPOST 3T Zero 25 Team Stealth, Ø27.2mm x 350mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Zipp 30 Course disc clincher, tubeless ready

FRONT HUB Felt Road RSL3, sealed cartridge bearing, 12 x 100mm thru axle, Center Lock, 28H

REAR HUB Felt Road RSL3, sealed cartridge bearing, 11-speed, 12 x 142mm thru axle, Center Lock, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Rubino Pro G+ folding, 700 x 25c

ACCESSORIES Carbon assembly paste, chain plate protector, SRAM eTap charger, SRAM eTap dongle

FR2 Disc



FINISH

Black (TeXtreme, Acid Green)

FRAME Felt Race Road UHC Advanced +
TeXtreme carbon fiber, MMC with InsideOut
construction, carbon fiber BB386 bottom bracket
shell, 12 x 142mm Syntace style thru axle,
flat mount disc brake standard, CNC aluminum
replaceable rear derailleur hanger, external
mechanical or internal electronic cable routing

FORK Felt Race Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

STEM 3T ARX II Team Stealth, ±6° rise, Ø31.8mm, 43cm: 80mm, 47 - 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR 3T Ergosum Team Stealth carbon fiber, 89mm reach, 128mm drop, Ø31.8mm, 43 - 51cm: 400mm*, 54 - 56cm: 420mm, 58 - 61cm: 440mm, *Note - ErnovaTeam Stealth for

43 - 51cm size

SIZES 43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano Ultegra Di2 R8070 11-speed

FRONT DERAILLEUR Shimano Ultegra R8050 Di2

REAR DERAILLEUR Shimano Ultegra R8050 Di2 11-speed short cage

CRANKSET Rotor 3D30 UBB5, 52/36T, 43 - 47cm: 167.5mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Token BB386 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano Ultegra R8070, hydraulic

FRONT BRAKE Shimano BR8070 hydraulic disc with 160mm rotor

WEIGHT 15.6lbs, 7.1Kg



REAR BRAKE Shimano BR8070 hydraulic disc with 140mm rotor

SADDLE Prologo Nago Evo PAS TiRox

SEATPOST 3T Zero 25 Team Stealth, Ø27.2mm x 350mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET DT Swiss FC1600 carbon, tubeless ready, 15mm inner width, 28mm depth; 1490g (wheelset)

FRONT HUB DT Swiss 350 Straight Pull, 12 x 100mm thru axle, Center Lock

REAR HUB DT Swiss 350 Straight Pull, 11-speed, 12 x 142mm thru axle, Center Lock

SPOKES DT Swiss Competition 2.0/1.8/2.0

TIRES Vittoria Rubino Pro G+ folding, 700 x 25c

ACCESSORIES Carbon assembly paste, chain plate protector, Di2 internal battery charging cables



FINISH

Matte TeXtreme (Green, Charcoal, White)

FRAME Felt Race Road UHC Advanced +
TeXtreme carbon fiber, MMC with InsideOut
construction, carbon fiber BB386 bottom bracket
shell, carbon fiber dropouts, CNC aluminum
replaceable rear derailleur hanger, external
mechanical or internal electronic cable routing

FORK Felt Race Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

STEM 3T ARX II Team Stealth, ±6° rise, Ø31.8mm, 43cm: 80mm, 47 - 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR 3T Ergosum Team Stealth carbon fiber, 89mm reach, 128mm drop, Ø31.8mm, 43 - 51cm: 400mm*, 54 - 56cm: 420mm, 58 - 61cm: 440mm, *Note - ErnovaTeam Stealth for 43 - 51cm size SIZES

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano Ultegra R8050 Di2 11-speed with secondary sprint shifters

FRONT DERAILLEUR Shimano Ultegra R8050 Di2 braze-on

REAR DERAILLEUR Shimano Ultegra R8050 Di2 11-speed short cage

CRANKSET Shimano Ultegra R8000, 52/36T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Token BB386 with 24mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano Ultegra R8050

WEIGHT 15.4lbs. 7.0Kg

FRONT BRAKE Shimano Ultegra R8000 dual pivot

REAR BRAKE Shimano Ultegra R8010 direct mount caliper

SADDLE Prologo Nago Evo PAS TiRox

SEATPOST 3T Zero 25 Team Stealth, Ø27.2mm x 350mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET MAVIC Ksyrium Elite

 $\textbf{FRONT HUB} \ \mathsf{MAVIC} \ \mathsf{Ksyrium} \ \mathsf{Elite}, \ \mathsf{100mm} \ \mathsf{QR}$

REAR HUB MAVIC Ksyrium Elite, 11-speed, 130mm QR

TIRES MAVIC Yksion Pro GripLink folding (front) and PowerLink folding (rear), 700 x 25c

ACCESSORIES Carbon assembly paste, chain plate protector, Di2 internal battery charging cables

FR3 Disc



FINISH

Matte TeXtreme (Aqua, Red, White)

FRAME Felt Race Road UHC Advanced +
TeXtreme carbon fiber, MMC with InsideOut
construction, carbon fiber BB386 bottom bracket
shell, 12 x 142mm Syntace style thru axle,
flat mount disc brake standard, CNC aluminum
replaceable rear derailleur hanger, external
mechanical or internal electronic cable routing

FORK Felt Race Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

STEM 3T ARX II Pro Grey, ±6° rise, Ø31.8mm, 43cm: 80mm, 47 - 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR 3T Ergosum Pro Grey, 89mm reach, 128mm drop, Ø31.8mm, 43 - 51cm: 400mm* 54 - 56cm: 420mm, 58 - 61cm: 440mm *Note - Ernova Pro Grey for 43 - 51cm size

SIZES

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano Ultegra R8020 11-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano Ultegra R8000 braze-on

REAR DERAILLEUR Shimano Ultegra R8000 11-speed short cage

CRANKSET Rotor 3D30 UBB5, 52/36T, 43 - 47cm: 167.5mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Token BB386 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano Ultegra R8020, hydraulic

FRONT BRAKE Shimano BR8070 hydraulic disc with 160mm rotor

WEIGHT

16.4lbs, 7.5Kg



REAR BRAKE Shimano BR8070 hydraulic disc with 140mm rotor

SADDLE Prologo Nago Evo PAS T2.0

SEATPOST Felt UHC Performance carbon fiber, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET DT Swiss P1800 Spline DB, tubeless ready, 18mm inner width, 23mm depth; 1675g (wheelset)

FRONT HUB DT Swiss 370 Straight Pull, 12 x 100mm thru axle, Center Lock

REAR HUB DT Swiss 370 Straight Pull, 11-speed, 12 x 142mm thru axle. Center Lock

SPOKES DT Swiss New Aero 2.0/1.2/3.0 (DS); Aerocomp 2.0/1.0/2.8 (NDS), bladed

TIRES Vittoria Rubino Pro G+ folding, 700 x 25c

ACCESSORIES Carbon assembly paste, chain plate protector



FINISH

Matte TeXtreme (Fire Fade)

FRAME Felt Race Road UHC Advanced +
TeXtreme carbon fiber, MMC with InsideOut
construction, carbon fiber BB386 bottom bracket
shell, carbon fiber dropouts, CNC aluminum
replaceable rear derailleur hanger, external
mechanical or internal electronic cable routing

FORK Felt Race Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

STEM 3T ARX II Pro Grey, ±6° rise, Ø31.8mm, 43cm: 80mm, 47 - 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR 3T Ergosum Pro Grey, 89mm reach, 128mm drop, Ø31.8mm, 43 - 51cm: 400mm*, 54 - 56cm: 420mm, 58 - 61cm: 440mm, *Note - Ernova Pro Grey for 43 - 51cm size

SIZES

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano Ultegra R8000 11-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano Ultegra R8000 braze-on

REAR DERAILLEUR Shimano Ultegra R8000 11-speed short cage

CRANKSET Shimano Ultegra R8000, 52/36T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Token BB386 with 24mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed,

BRAKE LEVERS Shimano Ultegra R8000

WEIGHT 16.3lbs. 7.4Ka

FRONT BRAKE Shimano Ultegra R8000 dual pivot

REAR BRAKE Shimano Ultegra R8010 direct mount caliper

SADDLE Prologo Nago Evo PAS T2.0

SEATPOST Felt UHC Performance carbon fiber, Ø27.2mm x 300mm length

 $\textbf{SEATPOST CLAMP} \ \text{Felt single bolt, } \emptyset 30.6 mm$

RIMS/WHEELSET DT Swiss F1825 Classic, tubeless ready, 18mm inner width, 23mm depth; 1845g (wheelset)

FRONT HUB DT Swiss 370, 100mm QR

 $\bf REAR~HUB~DT~Swiss~370,\,11\text{-speed},\,130mm~QR$

 $\textbf{SPOKES} \ \mathsf{DT} \ \mathsf{Swiss} \ \mathsf{Champion} \ 2.0$

TIRES Vittoria Rubino Pro G+ folding, 700 x 25c

ACCESSORIES Carbon assembly paste, chain plate protector

FR5 FR30



FINISH

Red (Carbon, White)

FRAME Felt Race Road UHC Advanced carbon fiber, MMC with InsideOut construction, carbon fiber BB386 bottom bracket shell, carbon fiber dropouts, CNC aluminum replaceable rear derailleur hanger, external mechanical or internal electronic cable routing

FORK Felt Race Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

STEM Felt VariableAngle, ±8°/±16° rise, Ø31.8mm, 43cm: 70mm, 47 : 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Felt Ergonomic SL Road Design, short 65mm reach, 125mm drop, Ø31.8mm, 51cm: 400mm, 54 - 56cm: 420mm, 58 - 61cm: 440mm SIZES

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano 105 11-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano 105 braze-on

REAR DERAILLEUR Shimano 105 11-speed short cage

CRANKSET Shimano 105, 50/34T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Token BB386 with 24mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano 105

FRONT BRAKE Tektro Quartz T741 dual pivot caliper

WEIGHT

17.7lbs, 8.03Kg



REAR BRAKE TRP T741 direct mount caliper

SADDLE Prologo Nago Evo PAS T2.0

SEATPOST Felt Race Road UHC Performance carbon fiber, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Road RSL3 tubeless ready, 17mm inner width, 28mm depth

FRONT HUB Felt R3, 100mm QR, 28H

REAR HUB Felt R3, sealed cartridge bearing, 11-speed, 130mm QR, 28H

SPOKES 2.0mm stainless steel

TIRES Rubino IV G+ folding, 700 x 25c

ACCESSORIES Carbon assembly paste, chain plate protector



FRAME Felt Race Road SuperLite custom butted aluminum, Dynaform smooth welded construction, BB386 bottom bracket shell, replaceable rear derailleur hanger

FORK Felt Race Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

STEM Felt VariableAngle, ±8°/±16° rise, Ø31.8mm, 43cm: 70mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Felt Ergonomic SL Road Design, short 65mm reach, 125mm drop, Ø31.8mm, 51cm: 400mm, 54 - 56cm: 420mm, 58 - 61cm: 440mm



43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano 105 11-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano 105 clamp-on, 034.9mm

REAR DERAILLEUR Shimano 105 11-speed short cage

CRANKSET Shimano 105, 50/34T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Token BB386 with 24mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano 105

WEIGHT 19.2lbs. 8.7Ka

FRONT BRAKE Dual pivot caliper

REAR BRAKE Dual pivot caliper

SADDLE Prologo Nago Evo PAS T2.0

SEATPOST Felt UHC Performance carbon fiber, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Road RSL3 tubeless ready, 17mm inner width, 28mm depth

FRONT HUB Felt R3, 100mm QR, 28H

REAR HUB Felt R3, sealed cartridge bearing, 11-speed, 130mm QR, 28H

SPOKES 2.0mm stainless steel

TIRES Rubino IV G+ folding, 700 x 25c



FR40 FR60



FINISH Matte Charcoal (Black)

FRAME Felt Race Road SuperLite custom butted aluminum, Dynaform smooth welded construction, BB386 bottom bracket shell, replaceable rear derailleur hanger

FORK Felt Race Road UHC Advanced carbon fiber monocogue construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

STEM Felt VariableAngle, ±8°/±16° rise, Ø31.8mm, 43cm: 70mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Felt Ergonomic SL Road Design, short 65mm reach, 125mm drop, Ø31.8mm, 51cm: 400mm, 54 - 56cm: 420mm, 58 - 61cm: 440mm

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano Tiagra 10-speed

FRONT DERAILLEUR Shimano Tiagra clamp-on,

REAR DERAILLEUR Shimano Tiagra 10-speed long

CRANKSET Shimano Tiagra, 50/34T, 43 - 47cm: 165mm. 51cm: 170mm. 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Token BB386 with 24mm bearings

CHAIN KMC X-10, 10-speed

FREEWHEEL/CASSETTE Shimano 10-speed, 12-28T TIRES Vittoria Zaffiro Pro folding, 700 x 25c

BRAKE LEVERS Shimano Tiagra

WEIGHT 20.3lbs. 9.2Ka



FRONT BRAKE Shimano Tiagra dual pivot caliper

REAR BRAKE Shimano Tiagra dual pivot caliper

SADDLE Felt SuperLite Road

SEATPOST Felt Race Road UHC Performance carbon fiber, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Road RSL3 tubeless ready, 17mm inner width, 24mm depth

FRONT HUB Felt R3, 100mm QR, 28H

REAR HUB Felt R3, sealed cartridge bearing, 10/11-speed, 130mm QR, 32H

SPOKES 2.0mm stainless steel



FINISH Navy (White)

FRAME Felt Race Road SuperLite custom butted aluminum, Dynaform smooth welded construction, BSA threaded bottom bracket shell, replaceable rear derailleur hanger

FORK Felt Race Road UHC Performance carbon fiber blades and dropouts, size specific ControlTaper aluminum steerer tube

HEADSET FSA threadless with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21 integrated sealed cartridge bearing, 1.125", 51 - 61cm: No.42B-CUP retainer bearing, 1.125 - 1.5"

STEM Felt VariableAngle, ±8°/±16° rise, Ø31.8mm, 43cm: 70mm, 47 cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Felt Ergonomic SL Road Design, short 65mm reach, 125mm drop, Ø31.8mm, 51cm: 400mm, 54 - 56cm: 420mm, 58 - 61cm: 440mm

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano Claris R2000 8-speed

FRONT DERAILLEUR Shimano Claris R2000 clamp-on, Ø31.8mm

REAR DERAILLEUR Shimano Claris R2000 8-speed short cage

CRANKSET Shimano R2000, 50/34T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET Sealed cartridge, BSA threaded, square taper axle, 68 x 110.5mm

CHAIN KMC 8-Speed

FREEWHEEL/CASSETTE Shimano 8-speed, 12-32T

WEIGHT 23.3lbs. 10.5Kg



FRONT BRAKE Dual pivot caliper

secondary top mount brake levers

REAR BRAKE Dual pivot caliper **SADDLE** Felt SuperLite Road

SEATPOST Felt SuperLite Road, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø31.8mm

RIMS/WHEELSET Felt Road RSL3 tubeless ready, 17mm inner width, 24mm depth

FRONT HUB Felt R4, 100mm QR, 28H

REAR HUB Felt R4, 11-speed, 130mm QR, 32H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro, 700 x 25c



FRFRD Disc Frameset

FRFRD Frameset



FINISH Matte TeXtreme (White)

SIZES 43, 47, 51, 54, 56, 58, 61cm WEIGHT TBA





FRAME Felt Race Road UHC Ultimate +
TeXtreme carbon fiber, MMC with InsideOut
construction, carbon fiber BB386 bottom bracket
shell, 12 x 142mm Syntace style thru axle,
flat mount disc brake standard, CNC aluminum
replaceable rear derailleur hanger, external
mechanical or internal electronic cable routing,
27.2mm seat post size

FORK Felt Race Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with carbon fiber cone spacer, Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

SEATPOST CLAMP 7075 CNC aluminum, titanium bolt and scandium nut, Ø30.6mm

ACCESSORIES Carbon assembly paste, chain plate protector, FSA headset, Felt seat clamp, front and rear thru axles



FINISH
Matte TeXtreme (White)

SIZES 43, 47, 51, 54, 56, 58, 61cm WEIGHT TBA



FRAME Felt Race Road UHC Ultimate +
TeXtreme carbon fiber, MMC with InsideOut
construction, carbon fiber BB386 bottom
bracket shell, carbon fiber dropouts, CNC aluminum
replaceable rear derailleur hanger, external mechanical or internal electronic cable routing, 27.2mm
seat post size

FORK Felt Race Road UHC Ultimate + Textreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts, integrated compression device

HEADSET FSA integrated sealed cartridge bearing with carbon fiber cone spacer, Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

SEATPOST CLAMP 7075 CNC aluminum, titanium bolt and scandium nut, Ø30.6mm

ACCESSORIES Carbon assembly paste, chain plate protector, FSA headset, Felt seat clamp FR1 Disc Frameset



FINISH
Matte TeXtreme (Silver, White)

SIZES 43, 47, 51, 54, 56, 58, 61cm WEIGHT TBA





FRAME Felt Race Road UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, carbon fiber BB386 bottom bracket shell, 12 x 142mm Syntace style thru axle, flat mount disc brake standard, CNC aluminum replaceable rear derailleur hanger, external mechanical or internal electronic cable routing, 27.2mm seat post size

FORK Felt Race Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with carbon fiber cone spacer, Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

STEM 3T ARX II Team Stealth, ±6° rise, Ø31.8mm, 43cm: 80mm, 47 - 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

SEATPOST CLAMP 7075 CNC aluminum, titanium bolt and scandium nut, Ø30.6mm

ACCESSORIES Carbon assembly paste, chain plate protector, FSA headset, Felt seat clamp, front and rear thru axles



FINISH

Matte TeXtreme (Pewter, Red)

SI7FS

43, 47, 51, 54, 56, 58, 61cm

WEIGHT 2.9lbs, 1.3Kg



FRAME Felt Race Road UHC Advanced +
TeXtreme carbon fiber, MMC with InsideOut
construction, carbon fiber BB386 bottom bracket
shell, carbon fiber dropouts, CNC aluminum
replaceable rear derailleur hanger, external
mechanical or internal electronic cable routing,
27.2mm seat post size

FORK Felt Race Road UHC Ultimate + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts, integrated compression device

HEADSET FSA integrated sealed cartridge bearing with carbon fiber cone spacer, Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56 - 61cm: No.42, 1.125 - 1.5"

SEATPOST CLAMP 7075 CNC aluminum, titanium bolt and scandium nut, Ø30.6mm

ACCESSORIES Carbon assembly paste, chain plate protector, FSA headset, Felt seat clamp



FRW SERIES

Meet the FRW, the ultimate road racing bike for the modern female athlete. The most dedicated cyclists demand a bike that delivers maximum performance, intuitive responsiveness and a perfect fit, and the FRW delivers on all fronts. Featuring the most refined version of Felt's legendary racing geometry ever, the FRW allows every rider to achieve her most powerful position. A highly tuned chassis supplies a precise level of compliance for long races and all-day training rides. A unique selection of components chosen for the anatomical needs of female athletes provides the perfect touch points for confident handling. Available in both rim brake- and disc brake-equipped variants, the FRW provides the most choice ever for racers worldwide.

FR2W Disc



FINISH

Yarrow Pink (Fire Facet, TeXtreme)

FRAME Felt Fit Woman Race Road UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, carbon fiber BB386 bottom bracket shell, 12 x 142mm Syntace style thru axle, flat mount disc brake standard, CNC aluminum replaceable rear derailleur hanger, external mechanical or internal electronic cable routing

FORK Felt Fit Woman Race Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56cm: No.42, 1.125 - 1.5"

STEM 3T ARX II Team Stealth, ±6° rise, Ø31.8mm, 43cm: 80mm, 47 - 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR 3T Ergosum Team Stealth carbon fiber, 89mm reach, 128mm drop, Ø31.8mm, 43 - 47cm: 380cm, 51cm: 400mm*, 54 - 56cm: 420mm, *Note - ErnovaTeam Stealth for 43 - 51cm size SIZES

43, 47, 51, 54, 56cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano Ultegra Di2 R8070 11-speed

FRONT DERAILLEUR Shimano Ultegra R8050 Di2

REAR DERAILLEUR Shimano Ultegra R8050 Di2 11-speed short cage

CRANKSET Rotor 3D30 UBB5, NoQ 52/36T, 43 - 47cm: 167.5mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET Token BB386 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano Ultegra R8070, hydraulic

FRONT BRAKE Shimano BR8070 hydraulic disc with 160mm rotor

WEIGHT

16.3lbs, 7.4Kg



REAR BRAKE Shimano BR8070 hydraulic disc with 140mm rotor

SADDLE Prologo NAGO EVO Space TiRox

SEATPOST 3T Zero 25 Team Stealth, Ø27.2mm, 48 - 51cm: 280mm length, 54 - 56: 350mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET DT Swiss FC1600 carbon, tubeless ready, 15mm inner width, 28mm depth; 1490g (wheelset)

FRONT HUB DT Swiss 350 Straight Pull, 12 x 100mm thru axle, Center Lock

REAR HUB DT Swiss 350 Straight Pull, 11-speed, 12 x 142mm thru axle, Center Lock

SPOKES DT Swiss Competition 2.0/1.8/2.0

TIRES Vittoria Rubino Pro G+ folding, 700 x 25c

ACCESSORIES Carbon assembly paste, chain plate protector, Di2 internal battery charging cables



FINISH

Matte TeXtreme (Black Facet, Rose Gold)

FRAME Felt Fit Woman Race Road UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, carbon fiber BB386 bottom bracket shell, 12 x 142mm Syntace style thru axle, CNC aluminum replaceable rear derailleur hanger, external mechanical or internal electronic cable routing

FORK Felt Fit Woman Race Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56cm: No.42, 1.125 - 1.5"

STEM 3T ARX II Team Stealth, ±6° rise, Ø31.8mm, 43cm: 80mm, 47 - 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR 3T Ergosum Team Stealth carbon fiber, 89mm reach, 128mm drop, Ø31.8mm, 43 - 47cm: 380cm, 51cm: 400mm*, 54 - 56cm: 420mm, *Note - ErnovaTeam Stealth for 43 - 51cm size SIZES

43, 47, 51, 54, 56cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano Ultegra R8050 Di2 11-speed with secondary sprint shifters

FRONT DERAILLEUR Shimano Ultegra R8050 Di2 braze-on

REAR DERAILLEUR Shimano Ultegra R8050 Di2 11-speed short cage

CRANKSET Shimano Ultegra R8000, 52/36T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET Token BB386 with 24mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano Ultegra R8050

FRONT BRAKE Shimano Ultegra R8000 dual pivot caliner

WEIGHT 15.2lbs. 6.8Kg

REAR BRAKE Shimano Ultegra R8010 direct mount

SADDLE Prologo NAGO EVO Space TiRox

SEATPOST 3T Zero 25 Team Stealth, Ø27.2mm, 48 - 51cm: 280mm length, 54 - 56: 350mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET MAVIC Ksyrium Elite

 $\textbf{FRONT HUB} \ \mathsf{MAVIC} \ \mathsf{Ksyrium} \ \mathsf{Elite}, \ \mathsf{100mm} \ \mathsf{QR}$

REAR HUB MAVIC Ksyrium Elite, 11-speed, 130mm QR

TIRES MAVIC Yksion Pro GripLink folding (front) and PowerLink folding (rear), 700 x 25c

ACCESSORIES Carbon assembly paste, chain plate protector, Di2 internal battery charging cables FR3W FR5W



FINISH

Black Supernova (TeXtreme)

FRAME Felt Fit Woman Race Road UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, carbon fiber BB386 bottom bracket shell, 12 x 142mm Syntace style thru axle, CNC aluminum replaceable rear derailleur hanger, external mechanical or internal electronic cable routing

FORK Felt Fit Woman Race Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56cm: No.42, 1.125 - 1.5"

STEM 3T ARX II Pro Grey, ±6° rise, Ø31.8mm, 43cm: 80mm, 47 - 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR 3T Ergosum Pro Grey, 89mm reach, 128mm drop, Ø31.8mm, 43 - 47cm: 380cm, 51cm: 400mm*, 54 - 56cm: 420mm, *Note - ErnovaTeam Stealth for 43 - 51cm size SIZES

43, 47, 51, 54, 56cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano Ultegra R8000 11-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano Ultegra R8000 braze-on

REAR DERAILLEUR Shimano Ultegra R8000 11-speed short cage

CRANKSET Shimano Ultegra R8000, 52/36T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET Token BB386 with 24mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano Ultegra R8000

FRONT BRAKE Shimano Ultegra R8000 dual pivot caliper

WEIGHT

16.3lbs, 7.4Kg



REAR BRAKE Shimano Ultegra R8010 direct mount caliper

SADDLE Prologo NAGO EVO Space T2.0

SEATPOST Felt Fit Woman Road UHC Performance carbon fiber, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET DT Swiss F1825 Classic, tubeless ready, 18mm inner width, 23mm depth; 1845g (wheelset)

FRONT HUB DT Swiss 370, 100mm QR

REAR HUB DT Swiss 370, 11-speed, 130mm QR

SPOKES DT Swiss Champion 2.0

TIRES Vittoria Rubino Pro G+ folding, 700 x 25c

ACCESSORIES Carbon assembly paste, chain plate protector



FINISH

Matte Carbon (Pewter, Aqua Mist)

FRAME Felt Fit Woman Race Road UHC Advanced carbon fiber, MMC with InsideOut construction, carbon fiber BB386 bottom bracket shell, carbon fiber dropouts, CNC aluminum replaceable rear derailleur hanger, external mechanical or internal electronic cable routing

FORK Felt Fit Woman Race Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56cm: No.42, 1.125 - 1.5"

STEM Felt Fit Woman SuperLite, ±17° rise, Ø31.8mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR Felt Fit Woman SuperLite Road, short 65mm reach, 125mm drop, Ø31.8mm, 43 - 47cm: 380mm, 51cm: 400mm, 54 - 56cm: 420mm SIZES

43, 47, 51, 54, 56cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano 105 11-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano 105 braze-on

REAR DERAILLEUR Shimano 105 11-speed short cage

CRANKSET Shimano 105, 50/34T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET Token BB386 with 24mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano 105

FRONT BRAKE Dual pivot caliper

WEIGHT 17.0lbs. 7.7Kg

REAR BRAKE TRP T741 direct mount caliper

SADDLE Prologo NAGO EVO Space T2.0

SEATPOST Felt Fit Woman Road UHC Performance carbon fiber, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Fit Women Road WRSL3, tubeless ready, 17mm inner width, 24mm depth

FRONT HUB Felt R3, 100mm QR, 28H

REAR HUB Felt R3, sealed cartridge bearing, 10-speed (11-speed compatible), 130mm QR, 32H

SPOKES 2.0mm stainless steel

TIRES Rubino IV G+ folding, 700 x 25c

ACCESSORIES Carbon assembly paste, chain plate protector

FR30W



FINISH

Matte Merlot (White, Fiesta Red)

FRAME Felt Fit Woman Road SuperLite custom butted aluminum, Dynaform smooth welded construction, BB386 bottom bracket shell, replaceable rear derailleur hanger

FORK Felt Fit Woman Race Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56cm: No.42, 1.125 - 1.5"

STEM Felt Fit Woman SuperLite, ±17° rise, Ø31.8mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR Felt Fit Woman SuperLite Road, short 65mm reach, 125mm drop, Ø31.8mm, 43 - 47cm: 380mm, 51cm: 400mm, 54 - 56cm: 420mm SIZES

43, 47, 51, 54, 56cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano 105 11-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano 105 clamp-on, Ø34.9mm

REAR DERAILLEUR Shimano 105 11-speed short

CRANKSET Shimano 105, 50/34T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET Token BB386 with 24mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

WEIGHT

18.0lbs, 8.2Kg

BRAKE LEVERS Shimano 105

FRONT BRAKE Dual pivot caliper

REAR BRAKE Dual pivot caliper

SADDLE Prologo NAGO EVO Space T2.0

SEATPOST Felt Fit Woman Road UHC Performance carbon fiber, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Fit Women Road WRSL3, tubeless ready, 17mm inner width, 24mm depth

FRONT HUB Felt R3, 100mm QR, 28H

REAR HUB Felt R3, sealed cartridge bearing, 11-speed, 130mm QR, 32H

SPOKES 2.0mm stainless steel

TIRES Rubino IV G+ folding, 700 x 25c



FINISH

Matte Pewter (Black, Magenta, Cyan)

FRAME Felt Fit Woman Road SuperLite custom butted aluminum, Dynaform smooth welded construction, BB386 bottom bracket shell, replaceable rear derailleur hanger

FORK Felt Fit Woman Race Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, blades and dropouts

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 54cm: No.382, 1.125 - 1.25", 56cm: No.42, 1.125 - 1.5"

STEM Felt Fit Woman SuperLite, ±17° rise, Ø31.8mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR Felt Fit Woman SuperLite Road, short 65mm reach, 125mm drop, Ø31.8mm, 43 - 47cm: 380mm, 51cm: 400mm, 54 - 56cm: 420mm SIZES

43, 47, 51, 54, 56cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano Tiagra 10-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano Tiagra clamp-on, Ø34.9mm

REAR DERAILLEUR Shimano Tiagra 10-speed long

CRANKSET Shimano Tiagra, 50/34T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET Token BB386 with 24mm bearings

CHAIN KMC X-10, 10-speed

FREEWHEEL/CASSETTE Shimano 10-speed, 12-28T

WEIGHT 19.5lbs. 8.8Ka

BRAKE LEVERS Shimano Tiagra

FRONT BRAKE Shimano Tiagra dual pivot caliper

REAR BRAKE Shimano Tiagra dual pivot caliper

SADDLE Felt Fit Woman Road

SEATPOST Felt Fit Woman Road UHC Performance carbon fiber, Ø27.2mm x 300mm length

 $\textbf{SEATPOST CLAMP} \; \text{Felt single bolt, } \emptyset 30.6 \text{mm}$

RIMS/WHEELSET Felt Fit Women Road WRSL3, tubeless ready, 17mm inner width, 22mm depth

FRONT HUB Felt R3, 100mm QR, 28H

REAR HUB Felt R3, sealed cartridge bearing, 10/11-speed, 130mm QR, 32H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro Pro folding, 700 x 25c



FINISH

Niagara Blue (Black, Mist Blue)

FRAME Felt Fit Woman Road SuperLite custom butted aluminum, Dynaform smooth welded construction, BSA threaded bottom bracket shell, replaceable rear derailleur hanger

FORK Felt Fit Woman Race Road UHC Performance carbon fiber blades and dropouts, size specific ControlTaper aluminum steerer tube

HEADSET FSA threadless with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21 integrated sealed cartridge bearing, 1.125", 51 - 56cm: No.42B-CUP retainer bearing, 1.125 - 1.5"

STEM Felt Fit Woman SuperLite, ±17° rise, Ø31.8mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR Felt Fit Woman SuperLite Road, short 65mm reach, 125mm drop, Ø31.8mm, 43 - 47cm: 380mm, 51cm: 400mm, 54 - 56cm: 420mm

SIZES 43, 47, 51, 54, 56cm

WEIGHT 21.1lbs, 9.5Kg



GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano Claris R2000 8-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano Claris R2000 clamp-on, Ø31.8mm

REAR DERAILLEUR Shimano Claris R2000 8-speed short cage

CRANKSET Shimano R2000, 50/34T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET Sealed cartridge, BSA threaded, square taper axle, 68 x 110.5mm

CHAIN KMC 8-Speed

FREEWHEEL/CASSETTE Shimano 8-speed, 12-32T

BRAKE LEVERS Shimano Claris R2000 with secondary top mount brake levers

FRONT BRAKE Dual pivot caliper

REAR BRAKE Dual pivot caliper

SADDLE Felt Fit Woman Road

SEATPOST Felt Fit Woman SuperLite Road, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø31.8mm

RIMS/WHEELSET Felt Fit Women Road WRSL3, tubeless ready, 17mm inner width, 22mm depth

FRONT HUB Felt R4, 100mm QR, 28H

REAR HUB Felt R4, sealed cartridge bearing, 10/11-speed, 130mm QR, 32H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro, 700 x 25c



VR SERIES

The VR Series is the next step in the evolution of the endurance road bike. Featuring an ideal blend of compliance and performance-oriented stiffness, the VR incorporates an incredible degree of versatility befitting the modern endurance road cyclist. The VR features enough clearance for utilizing a variety of tire widths, giving you the option of running narrow slick treads for fast road rides, knobby rubber for off-road excursions, and everything in between. Endurance-oriented geometry designed around an upright riding position, combined with a newly developed seat stay configuration, offers enhanced comfort and more confident handling characteristics for long days in the saddle. Extend every ride and enhance your experience with the Felt VR.



VR2 VR3



FINISH

Charcoal Metallic (TeXtreme, Red)

FRAME Felt Variable Road UHC Advanced +
TeXtreme carbon fiber, MMC with InsideOut
construction, carbon fiber BB386 bottom bracket
shell, 12 x 142mm with Syntace style thru axle,
flat mount disc brake standard, replaceable rear
derailleur hanger, internal mechanical or electronic
cable routing

FORK Felt Variable Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with carbon fiber cone spacer, Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 61cm: No.42, 1.125 - 1.5"

STEM 3T ARX II Pro Grey, ±6° rise, Ø31.8mm, 43cm: 80mm, 47 - 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR 3T Ernova Pro, 77mm reach, 123mm drop, Ø31.8mm, 43-47cm: 380mm, 51cm: 400mm, 54 - 56cm: 420mm, 58 - 61cm: 440mm

SIZES

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano Ultegra Di2 R8070 11-speed

FRONT DERAILLEUR Shimano Ultegra R8050 Di2 braze-on

REAR DERAILLEUR Shimano Ultegra R8050 Di2 11-speed long cage

CRANKSET FSA SL-K Modular Adventure BB386, 48/32T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET FSA BB386 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-32T

BRAKE LEVERS Shimano Ultegra R8070, hydraulic

FRONT BRAKE Shimano R8070 hydraulic disc with 160mm rotor

WEIGHT

16.2lbs, 7.4Kg



REAR BRAKE Shimano R8070 hydraulic disc with 140mm rotor

SADDLE Prologo Scratch 2 Space T2.0

SEATPOST 3T Zero 25 Team Stealth, Ø27.2mm x 350mm

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET DT Swiss ER1400 Spline db 21, tubeless ready, 20mm inner width, 21mm depth, 1475g (wheelset)

FRONT HUB DT Swiss 240db, 12 x 100mm thru axle, Center Lock

REAR HUB DT Swiss 240db, 11-speed, 12 x 142mm thru axle, Center Lock

SPOKES DT Swiss Aerolite 2.0/0.9/2.3 (front); Aerocomp 2.0/1.25/2.3 (Rear), bladed

TIRES Vittoria Rubino Pro G+ folding, 700 x 28c

ACCESSORIES Carbon assembly paste, chain plate protector, valve cores, Di2 internal battery charging cables



FINISH

cable routing

Matte TeXtreme (Acid Green, Black Fade)

FRAME Felt Variable Road UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, carbon fiber BB386 bottom bracket shell, 12 x 142mm with Syntace style thru axle, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical or electronic

FORK Felt Variable Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 61cm: No.42, 1.125 - 1.5"

STEM Felt VR OS SuperLite, ±6° rise, Ø35mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Felt VR OS SuperLite Road Variable-Shape, short 65mm reach, 125mm drop, Ø35mm, 43cm: 380mm, 47cm: 400mm, 51cm: 420mm, 54cm: 440mm, 56 - 61cm: 460mm SIZES

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano Ultegra R8020 11-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano Ultegra R8000 braze-on

REAR DERAILLEUR Shimano Ultegra R8000 11-speed long cage

CRANKSET Rotor 3D30 Adventure Crank, 48/32T, 43 - 47cm: 167.5mm, 51cm: 170mm, 54 - 56cm: 172.5mm --- 58 - 61cm: 175mm

BOTTOM BRACKET FSA BB386 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-32T

BRAKE LEVERS Shimano Ultegra R8020, hydraulic

FRONT BRAKE Shimano R8070 hydraulic disc with 160mm rotor

WEIGHT 17.3lbs. 7.9Ka

REAR BRAKE Shimano R8070 hydraulic disc with 140mm rotor

SADDLE Prologo Kappa Space T2.0

SEATPOST Felt VR UHC Performance carbon fiber, Ø27.2mm x 330mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET DT Swiss E1800 db 23, tubeless ready, 20mm inner width, 23mm depth, 1655g (wheelset)

FRONT HUB DT Swiss 370db, 12 x 100mm thru axle, Center Lock

REAR HUB DT Swiss 370db, 11-speed, 12 x 142mm thru axle, Center Lock

SPOKES DT Swiss New aero 2.0/1.2/3.0 (NDS); Aerocomp 2.0/1.0/2.8 (DS), bladed

TIRES Vittoria Rubino Pro G+ folding, 700 x 28c

ACCESSORIES Carbon assembly paste, valve cores, chain plate protector

VR4 VR5



FINISH

Red (Carbon, White)

FRAME Felt Variable Road UHC Performance carbon fiber, MMC with InsideOut construction, carbon fiber BB386 bottom bracket shell, 12 x 142mm with Syntace style thru axle, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical or electronic cable routing

FORK Felt Variable Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 61cm: No.42, 1.125 - 1.5"

STEM Felt VR OS SuperLite, ±6° rise, Ø35mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Felt VR OS SuperLite Road Variable-Shape, short 65mm reach, 125mm drop, Ø35mm, 43cm: 380mm, 47cm: 400mm, 51cm: 420mm, 54cm: 440mm, 56 - 61cm: 460mm SIZES

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS SRAM Rival 1, 1x11 with Felt Elite sealed derailleur cable and housing

REAR DERAILLEUR SRAM Force CX1 11-speed long cage

CRANKSET Quarq Prime Aluminum, XSYNC 44T and 38T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET Token BB386 with 22/24mm bearings

CHAIN SRAM 11-speed

FREEWHEEL/CASSETTE SRAM PG1130 11-speed,

BRAKE LEVERS SRAM Rival 1, hydraulic

FRONT BRAKE SRAM Rival hydraulic disc with 160 mm Centerline rotor

WEIGHT 19.6lbs. 8.9Kg



REAR BRAKE SRAM Rival hydraulic disc with 160mm Centerline rotor

SADDLE Prologo Kappa Space PAS T2.0

SEATPOST Felt VR UHC Performance carbon fiber, Ø27.2mm x 330mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Zipp 30 Course disc clincher, tubeless ready

FRONT HUB Felt Variable Road RSL3, sealed cartridge bearing, 12 x 100mm thru axle, Center Lock, 28H

REAR HUB Felt Variable Road RSL3, sealed cartridge bearing, 11-speed, 12 x 142mm thru axle, Center Lock, 28H

SPOKES 2.0mm stainless steel

TIRES Schwalbe G-ONE Speed RaceGuard, TL-Easy, Folding, 700 x 30c

ACCESSORIES SRAM Rival 1 XSYNC, 38T Chainring, valve cores, tubeless rim tape, sealant, Carbon assembly paste, chain plate protector



FINISH

Matte Carbon (Charcoal)

FRAME Felt Variable Road UHC Performance carbon fiber, MMC with InsideOut construction, carbon fiber BB386 bottom bracket shell, 12 x 142mm with Syntace style thru axle, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical or electronic cable routing

FORK Felt Variable Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 61cm: No.42, 1.125 - 1.5"

STEM Felt VR OS SuperLite, ±6° rise, Ø35mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Felt VR OS SuperLite Road Variable-Shape, short 65mm reach, 125mm drop, Ø35mm, 43cm: 380mm, 47cm: 400mm, 51cm: 420mm, 54cm: 440mm, 56 - 61cm: 460mm SIZES

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano RS505 11-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano 105 braze-on

REAR DERAILLEUR Shimano 105 11-speed long cage

CRANKSET FSA Gossamer Pro ABS Adventure BB386 EVO, 48/32T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET FSA BB386 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-32T

BRAKE LEVERS Shimano RS505, hydraulic

FRONT BRAKE Shimano RS505 hydraulic disc with 160mm rotor

WEIGHT 19.6lbs. 8.9Ka

REAR BRAKE Shimano RS505 hydraulic disc with 140mm rotor

SADDLE Prologo Kappa Space PAS

SEATPOST Felt VR UHC Performance carbon fiber, Ø27.2mm x 330mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Variable Road VR19, tubeless ready, 19mm inner width, 23mm depth

FRONT HUB Felt Variable Road RSL3, sealed cartridge bearing, 12 x 100mm thru axle, Center Lock, 28H

REAR HUB Felt Variable Road RSL3, sealed cartridge bearing, 11-speed, 12 x 142mm thru axle, Center Lock, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Rubino Pro G+, folding, 700 x 28c

ACCESSORIES Carbon assembly paste, chain plate protector

VR5 VR6



FINISH

Matte Carbon (Light Blue, Charcoal)

FRAME Felt Variable Road UHC Performance carbon fiber, MMC with InsideOut construction, BB386 bottom bracket standard and 12 x 142mm with Syntace style thru axle dropouts, flat-mount disc brake standard, replaceable rear derailleur hanger. mechanical (internal) or electronic (internal) cable routing

FORK Felt Variable Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steer tube and carbon fiber steer tube. crown, blades with flat- mount disc standard and 12 x 100mm Maxle style dropouts

HEADSET 43 - 47cm: FSA IS-21 integrated, 1.125"" sealed cartridge bearing; 51 - 61cm: FSA NO.38/42, 1.125"" - 1.5"" sealed cartridge bearing ; with Felt VariableHeight Cone Spacers (20mm PC. 4.5mm aluminum). 1 x 10mm + 2 x 5mm PC headset spacers, Felt carbon fiber top cap and aluminum bolt

STEM Felt VR OS SuperLite, ±6° rise, Ø35mm 43cm =60mm 47cm =80mm 51cm =90mm 54 - 56cm =100mm 58cm =110mm 61cm =120mm

HANDLEBAR Felt VR OS SuperLite Road Variable-Shape, short 65mm reach, 125mm drop, Ø35mm 43cm = 400mm 47 - 51cm = 420mm 54cm = 440mm 56 - 61cm = 460mm

47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel Tape with 3M Reflective Base

SHIFTERS Shimano RS505 Hydraulic

FRONT DERAILLEUR Shimano 105 braze-on

REAR DERAILLEUR Shimano 105 long cage

CRANKSET New FSA Gossamer Pro ABS Adventure BB386 EVO 48/32T, 43-47cm =165mm 51cm = 170mm 54 - 56cm = 172.5mm 58 - 61cm =

BOTTOM BRACKET FSA PF30

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-32T

BRAKE LEVERS Shimano RS505 Hydraulic

FRONT BRAKE Shimano RS505 Hydraulic Disc with Shimano Ice-Tech 160mm rotor

REAR BRAKE Shimano RS505 Hydraulic Disc with Shimano Ice-Tech 140mm rotor

WEIGHT 19.6lbs. 8.92ka

SADDLE Prologo Kappa Space PAS SEATPOST Felt VR UHC Performance carbon fiber, Ø27.2mm, 330mm length

SEATPOST CLAMP Felt. Ø30.6mm

RIMS/WHEELSET Felt Versatile Road VR19 Disc (tubeless ready), 19mm Width (Inner), 23mm Depth

FRONT HUB Felt Versatile Road RSL3 Disc, 12mm Thru Axle, sealed bearing, 28H, Center Lock

REAR HUB Felt Versatile Road RSL3 Disc, 12mm Thru Axle, sealed cartridge bearing, 28H, 11-speed, Center Lock

SPOKES 2.0mm stainless steel

TIRES Schwalbe Durano Race Guard HS 464, 700c x 28c

ACCESSORIES Carbon assembly paste, chain plate



FINISH

Matte Black (Carbon, Magenta)

FRAME Felt Variable Road UHC Performance carbon

fiber BB386 bottom bracket shell, 12 x 142mm with Syntace style thru axle, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical or electronic cable routing FORK Felt Variable Road UHC Advanced carbon

fiber, MMC with InsideOut construction, carbon

fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 61cm: No.42, 1.125 - 1.5"

STEM Felt VR OS SuperLite, ±6° rise, Ø35mm. 43cm: 60mm, 47cm: 80mm, 51cm: 90mm 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Felt VR OS SuperLite Road Variable-Shape, short 65mm reach, 125mm drop, Ø35mm, 43cm: 380mm, 47cm: 400mm, 51cm: 420mm, 54cm: 440mm, 56 - 61cm: 460mm

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano RS405 10-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano Tiagra braze-on

REAR DERAILLEUR Shimano Tiagra 10-speed long

CRANKSET FSA Omega Adventure BB386 EVO, 48/32T. 43 - 47cm: 165mm, 51cm: 170mm. 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET FSA BB386 with 30mm bearings

CHAIN KMC X-10, 10-speed

FREEWHEEL/CASSETTE Shimano 10-speed, 11-32T

BRAKE LEVERS Shimano RS405, hydraulic

FRONT BRAKE Shimano RS405 hydraulic disc with 160mm rotor

20.1lbs. 9.1Ka

WEIGHT

REAR BRAKE Shimano RS405 hydraulic disc with 140mm rotor

SADDLE Felt Variable Road

SEATPOST Felt VR UHC Performance carbon fiber, Ø27.2mm x 330mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Variable Road VR19, tubeless ready, 19mm inner width, 23mm depth

FRONT HUB Felt Variable Road RSL3. 12 x 100mm thru axle, Center Lock, 28H

REAR HUB Felt Variable Road RSL3, 10/11-speed, 12 x 142mm thru axle, Center Lock, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro Folding, 700 x 28c

ACCESSORIES Carbon assembly paste, chain plate protector



VR30



FINISH

Matte Black (Red, White)

FRAME Felt Variable Road Disc FLite custom butted aluminum, hydroform smooth welded construction, BB386 bottom bracket shell, 12 x 142mm with Syntace style thru axle, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical cable routing

FORK Felt Variable Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, crown, and blades with flat mount disc standard and 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 61cm: No.42, 1.125 - 1.5"

STEM Felt VR OS SuperLite, ±6° rise, Ø35mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Felt VR OS SuperLite Road Variable-Shape, short 65mm reach, 125mm drop, Ø35mm, 43cm: 380mm, 47cm: 400mm, 51cm: 420mm, 54cm: 440mm, 56 - 61cm: 460mm SIZES

43, 47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano RS505 11-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano 105 clamp-on, Ø34.9mm

REAR DERAILLEUR Shimano 105 11-speed long

CRANKSET FSA Omega Adventure BB386 EVO, 48/32T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm, 58 - 61cm: 175mm

BOTTOM BRACKET FSA BB386 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-32T

BRAKE LEVERS Shimano RS505, hydraulic

WEIGHT

21.2lbs, 9.6Kg



FRONT BRAKE Shimano RS505 hydraulic disc with 160mm rotor

REAR BRAKE Shimano RS505 hydraulic disc with 140mm rotor

SADDLE Prologo Kappa Space

SEATPOST Felt VR UHC Performance carbon fiber, Ø27.2mm x 330mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Variable Road VR19, tubeless ready, 19mm inner width, 23mm depth

FRONT HUB Felt Variable Road RSL3 Disc, sealed cartridge bearing, 12 x 100mm thru axle, Center Lock. 28H

REAR HUB Felt Variable Road RSL3, 11-speed, 12 x 142mm thru axle, Center Lock, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro Folding, 700 x 28c



FINISH

Matte Cyan (Black, Red)

FRAME Felt Variable Road Disc FLite custom butted aluminum, hydroform smooth welded construction, BB386 bottom bracket shell, 12 x 142mm with Syntace style thru axle,

FORK Felt Variable Road Disc UHC Advanced carbon fiber construction, size specific ControlTaper carbon fiber steer tube and carbon fiber steer tube, crown, blades with flat- mount disc standard and 12 x 100mm Maxle style dropouts

flat mount disc brake standard, replaceable rear

derailleur hanger, internal mechanical cable routing

HEADSET 43 - 47cm: FSA IS-21 integrated,
1.125"" sealed cartridge bearing; 51 - 61cm: FSA
NO.38/42, 1.125"" - 1.5"" sealed cartridge bearing; with Felt VariableHeight Cone Spacers (20mm
PC, 4.5mm aluminum), 1 x 10mm + 2 x 5mm PC
headset spacers, Felt carbon fiber top cap and
aluminum bolt

STEM Felt VR OS SuperLite, ±6° rise, Ø35mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm, 58cm: 110mm, 61cm: 120mm

HANDLEBAR Felt VR OS SuperLite Road Variable-Shape, short 65mm reach, 125mm drop, Ø35mm 43cm = 400mm 47 - 51cm = 420mm 54cm = 440mm 56 - 61cm = 460mm SIZES

47, 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel Tape with 3M Reflective Base

SHIFTERS Shimano RS505 Hydraulic

FRONT DERAILLEUR Shimano 105 clamp-on, Ø34.9mm

REAR DERAILLEUR Shimano 105 long cage

CRANKSET FSA Omega Adventure BB386 EVO 43-47cm =165mm 51cm = 170mm 54 - 56cm = 172.5mm 58 - 61cm = 175mm

BOTTOM BRACKET FSA BB386 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-32T

BRAKE LEVERS Shimano 105

FRONT BRAKE Shimano RS505 Hydraulic Disc with Shimano Ice-Tech 160mm rotor

REAR BRAKE Shimano RS505 Hydraulic Disc with Shimano Ice-Tech 140mm rotor

SADDLE Prologo Kappa Space

WEIGHT 21.25lbs. 9.64Ka

SEATPOST Felt VR UHC Performance carbon fiber, Ø27.2mm, 330mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Variable Road VR19 Disc (tubeless ready), 19mm Width (Inner), 23mm Depth

FRONT HUB Felt Variable Road RSL3 Disc, 12mm Thru Axle, sealed bearing, 28H, Center Lock

REAR HUB Felt Variable Road RSL3 Disc, 12mm Thru Axle, sealed cartridge bearing, 28H, 11-speed, Center Lock

SPOKES 2.0mm stainless steel

TIRES Schwalbe Durano Race Guard HS 464, 700c x 28c

VR40



FINISH

Matte Acid Green (Black)

FRAME Felt Variable Road Disc FLite custom butted aluminum, hydroform smooth welded construction, BB386 bottom bracket shell, 12 x 142mm with Syntace style thru axle, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical cable routing

FORK Felt Variable Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, crown, and blades with flat mount disc standard and 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125" --- 51 - 61cm: No.42, 1.125 - 1.5"

STEM Felt VR OS SuperLite, ±6° rise, Ø35mm, 43cm: 60mm --- 47: 80mm --- 51cm: 90mm --- 54 - 56cm: 100mm --- 58cm: 110mm --- 61cm: 120mm

HANDLEBAR Felt VR OS SuperLite Road Variable-Shape, short 65mm reach, 125mm drop, Ø35mm, 43cm: 380mm --- 47cm: 400mm --- 51cm: 420mm --- 54cm: 440mm --- 56 - 61cm: 460mm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SIZES

43, 47, 51, 54, 56, 58, 61cm

SHIFTERS Shimano Tiagra 10-speed with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano Tiagra clamp-on, Ø34.9mm

REAR DERAILLEUR Shimano Tiagra 10-speed long cane

CRANKSET FSA Vero Pro Adventure BB386 EVO, 48/32T, 43 - 47cm: 165mm -- 51cm: 170mm --- 54 - 56cm: 172.5mm --- 58 - 61cm: 175mm

BOTTOM BRACKET FSA BB386 with 30mm bearings and 19mm reducers

CHAIN KMC X-10, 10-speed

FREEWHEEL/CASSETTE Shimano 10-speed, 11-32T

BRAKE LEVERS Shimano Tiagra 10-speed

FRONT BRAKE Rever CX1 Flat Mount Dual Movement Disc with 160mm rotor

REAR BRAKE Rever CX1 Flat Mount Dual Movement Disc with 160mm rotor

SADDLE Felt Variable Road

WEIGHT

21.8lbs, 9.9Kg



SEATPOST Felt VR UHC Performance carbon fiber, Ø27.2mm x 330mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Variable Road VR19, tubeless ready, 19mm inner width, 23mm depth

FRONT HUB Felt Variable Road RSL3 Disc, 12 x 100mm thru axle, 6-bolt, 28H

REAR HUB Felt Variable Road RSL3, 11-speed, 12 x 142mm thru axle, 6-bolt, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro Folding, 700x28c



Matte Black (Aqua, Red)

FRAME Felt Variable Road Disc FLite custom butted aluminum, Dynaform TIG-welded construction, BSA threaded bottom bracket shell, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical cable routing

FORK Felt Variable Road UHC Advanced carbon fiber blades, size specific ControlTaper aluminum steerer tube, carbon dropouts

HEADSET FSA threadless with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21 integrated sealed cartridge bearing, 1.125" --- 51 - 61cm: No.42B-CUP retainer bearing, 1.125 - 1.5"

STEM Felt VR SuperLite, ±7° rise, Ø31.8mm, 43cm: 60mm --- 47 : 80mm --- 51cm: 90mm --- 54 - 56cm: 100mm --- 58cm: 110mm --- 61cm: 120mm

HANDLEBAR Felt VR SuperLite Road, 86mm reach, 130mm drop, Ø31.8mm, 43 - 51cm: 42/45cm --- 54cm: 44/47cm --- 56 - 61cm: 46/49cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano Claris R2000 8-speed

SIZES

43, 47, 51, 54, 56, 58, 61cm

FRONT DERAILLEUR Shimano Claris R2000 clampon, Ø31.8mm

REAR DERAILLEUR Shimano Claris R2000 8-speed short cage

CRANKSET FSA Tempo Adventure 3-piece, 48/32T, 43 - 47cm: 165mm -- 51cm: 170mm --- 54 - 56cm: 172.5mm

BOTTOM BRACKET Sealed cartridge, BSA threaded, square taper axle, 68 x 120mm

CHAIN KMC 8-Speed

FREEWHEEL/CASSETTE Shimano 8-speed, 12-32T

BRAKE LEVERS Shimano Claris R2000

FRONT BRAKE Promax Flat Mount Dual Movement Disc with 160mm rotor

REAR BRAKE Promax Flat Mount Dual Movement Disc with 160mm rotor

SADDLE Felt Variable Road

SEATPOST Felt VR Road SL seat post, Ø27.2mm x 330mm length

WEIGHT 22.8lbs. 10.4Ka

SEATPOST CLAMP Felt single bolt, Ø31.8mm

RIMS/WHEELSET Felt Variable Road VR19, tubeless ready, 19mm inner width, 23mm depth

FRONT HUB Felt Variable Road RSL3 Disc, 100mm QR. 6-bolt, 28H

REAR HUB Felt Variable Road RSL3 Disc, 8/9/10-speed, 135mm QR, 6-Bolt, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro, 700 x 28c



VR60 VR1 Frameset



FINISH

Charcoal (Black, Orange Fade)

FRAME Felt Variable Road Disc FLite custom butted aluminum, Dynaform TIG-welded construction, BSA threaded bottom bracket shell, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical cable routing

FORK Felt Variable Road UHC Advanced carbon fiber blades, size specific ControlTaper aluminum steerer tube, carbon dropouts

HEADSET FSA threadless with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21 integrated sealed cartridge bearing, 1.125" --- 51 - 61cm: No.42B-CUP retainer bearing, 1.125 - 1.5"

STEM Felt VR SuperLite, ±7° rise, Ø31.8mm, 43cm: 60mm --- 47:80mm --- 51cm:90mm --- 54 -56cm: 100mm --- 58cm: 110mm --- 61cm: 120mm

HANDLEBAR Felt VR SuperLite Road, 86mm reach, 130mm drop, Ø31.8mm, 43 - 51cm: 42/45cm ---54cm: 44/47cm --- 56 - 61cm: 46/49cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano Claris R2000 8-speed

on, Ø31.8mm

43, 47, 51, 54, 56, 58, 61cm

22.8lbs, 10.4Kg

REAR DERAILLEUR Shimano Claris R2000 8-speed

FRONT DERAILLEUR Shimano Claris R2000 clamp-

CRANKSET FSA Tempo Adventure 3-piece, 48/32T, 43 - 47cm: 165mm -- 51cm: 170mm --- 54 - 56cm: 172.5mm

BOTTOM BRACKET Sealed cartridge, BSA threaded, square taper axle, 68 x 120mm

CHAIN KMC 8-Speed

FREEWHEEL/CASSETTE Shimano 8-speed, 12-32T

BRAKE LEVERS Shimano Claris R2000

FRONT BRAKE Promax Flat Mount Dual Movement Disc with 160mm rotor

REAR BRAKE Promax Flat Mount Dual Movement Disc with 160mm rotor

SADDLE Felt Variable Road

SEATPOST Felt VR Road SL seat post, Ø27.2mm x 330mm length

WEIGHT



SEATPOST CLAMP Felt single bolt, Ø31.8mm

RIMS/WHEELSET Felt Variable Road VR19, tubeless ready, 19mm inner width, 23mm depth

FRONT HUB Felt Variable Road RSL3 Disc, 100mm QR, 6-bolt, 28H

REAR HUB Felt Variable Road RSL3 Disc, 8/9/10-speed, 135mm QR, 6-Bolt, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro, 700 x 28c



FINISH

Matte Aqua (TeXtreme, White)

43, 47, 51, 54, 56, 58, 61cm

WEIGHT 3.07lbs. 1.6Ka



FRAME Felt Variable Road UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, carbon fiber BB386 bottom bracket shell, 12 x 142mm with Syntace style thru axle, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical or electronic cable routing, 27.2mm seat post size

FORK Felt Variable Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with carbon fiber cone spacer, Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 61cm: No.42, 1.125 - 1.5"

SEATPOST CLAMP Felt single bolt, Ø30.6mm

ACCESSORIES Carbon assembly paste, chain plate protector, FSA headset, Felt seat clamp, front and rear thru axles



VRW SERIES

The VRW is the ultimate bike for the modern female endurance rider looking to tackle her next adventure. Featuring a meticulously crafted blend of comfort-oriented compliance and performance-minded stiffness, the VRW is an ideal companion for both short, leisurely spins and epic, all-day riding excursions. A unique, top tube-mounted storage solution and an optional, proprietary fender kit give endurance riders more freedom than ever to explore new roads and extend their rides further than ever before, in any environment or condition. Ample tire clearance and disc brakes empower the VRW and its rider with versatility and confidence, no matter where the road might lead.

VR2W VR3W



FINISH

Matte TeXtreme (Anthracite, Magenta)

FRAME Felt Fit Woman Variable Road UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, BB386 bottom bracket shell, 12 x 142mm with Syntace style thru axle, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical or electronic cable routing

FORK Felt Fit Woman Variable Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with carbon fiber cone spacer, Felt top cap, 43 - 47cm: IS-21, 1.125", 51 - 56cm: No.42, 1.125 - 1.5"

STEM 3T ARX II Pro Grey, ±6° rise, Ø31.8mm, 43cm: 80mm, 47 - 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR 3T Ernova Pro, 77mm reach, 123mm drop, Ø31.8mm, 43-47cm: 380mm, 51cm: 400mm, 54 - 56cm: 420mm

SIZES

43, 47, 51, 54, 56cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano Ultegra R8070 11-speed Di2, hydraulic

FRONT DERAILLEUR Shimano Ultegra R8050 Di2 braze-on

REAR DERAILLEUR Shimano Ultegra R8050 Di2 11-speed long cage

CRANKSET FSA SL-K Modular Adventure BB386, 48/32T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET FSA BB386 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-32T

BRAKE LEVERS Shimano Ultegra R8070, hydraulic

FRONT BRAKE Shimano R8070 hydraulic disc with 160mm rotor

WEIGHT

16.0lbs, 7.3Kg



REAR BRAKE Shimano R8070 hydraulic disc with 140mm rotor

SADDLE Prologo Scratch 2 Space T2.0

SEATPOST 3T Zero 25 Team Stealth, Ø27.2mm x 350mm

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET DT Swiss ER1400 Spline db 21, tubeless ready, 20mm inner width, 21mm depth, 1475g (wheelset)

FRONT HUB DT Swiss 240db, 12 x 100mm thru axle, Center Lock

REAR HUB DT Swiss 240db, 11-speed, 12 x 142mm thru axle, Center Lock

SPOKES DT Swiss Aerolite 2.0/0.9/2.3 (front); Aerocomp 2.0/1.25/2.3 (Rear), bladed

TIRES Vittoria Rubino Pro G+ folding, 700 x 28c

ACCESSORIES Carbon assembly paste, chain plate protector, valve cores, Di2 internal battery charging cables



FINISH

TeXtreme (Shell Blue, Electricity Yellow)

FRAME Felt Fit Woman Variable Road UHC
Advanced + TeXtreme carbon fiber, MMC with
InsideOut construction, BB386 bottom bracket
shell, 12 x 142mm with Syntace style thru axle,
flat mount disc brake standard, replaceable rear
derailleur hanger, internal mechanical or electronic
cable routing

FORK Felt Fit Woman Variable Road UHC Advanced + TeXtreme carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 56cm: No.42, 1.125 - 1.5"

STEM Felt Fit Woman VR OS SuperLite, ±6° rise, Ø35mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR Felt Fit Woman VR OS SuperLite Road VariableShape, short 65mm reach, 125mm drop, Ø35mm, 43cm: 360mm, 47cm: 380mm, 51cm: 400mm, 54cm: 420mm, 56cm: 440mm SIZES

43, 47, 51, 54, 56cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano Ultegra R8020 11-speed, hydraulic with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano Ultegra R8000 braze-on

REAR DERAILLEUR Shimano Ultegra R8000 11-speed long cage

CRANKSET Rotor 3D30 Adventure Crank, 48/32T, 43 - 47cm: 167.5mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET Rotor BB386 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-32T

BRAKE LEVERS Shimano Ultegra R8020, hydraulic

WEIGHT 17.1lbs. 7.8Kg

FRONT BRAKE Shimano R8070 hydraulic disc with 160mm rotor

REAR BRAKE Shimano R8070 hydraulic disc with 140mm rotor

SADDLE Prologo Kappa DEA2 T2.0

SEATPOST Felt Fit Woman VR UHC Performance carbon fiber, Ø27.2mm x 330mm length

 $\textbf{SEATPOST CLAMP} \; \text{Felt single bolt, } \emptyset 30.6 \text{mm}$

RIMS/WHEELSET DT Swiss E1800 db 23, tubeless ready, 20mm inner width, 23mm depth, 1655g (wheelset)

FRONT HUB DT Swiss 370db, 12 x 100mm thru axle, Center Lock

REAR HUB DT Swiss 370db, 11-speed, 12 x 142mm thru axle, Center Lock

SPOKES DT Swiss New aero 2.0/1.2/3.0 (NDS); Aerocomp 2.0/1.0/2.8 (DS), bladed

TIRES Vittoria Rubino Pro G+, 700 x 28c

ACCESSORIES Carbon assembly paste, chain plate protector, valve cores

VR5W VR6W



FINISH White (Pearl)

FRAME Felt Fit Woman Variable Road UHC
Performance carbon fiber, MMC with InsideOut
construction, BB386 bottom bracket shell,
12 x 142mm with Syntace style thru axle,
flat mount disc brake standard, replaceable
rear derailleur hanger, internal mechanical or
electronic cable routing

FORK Felt Fit Woman Variable Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 56cm: No.42, 1.125 - 1.5"

STEM Felt Fit Woman VR OS SuperLite, ±6° rise, Ø35mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR Felt Fit Woman VR OS SuperLite Road VariableShape, short 65mm reach, 125mm drop, Ø35mm, 43cm: 360mm, 47cm: 380mm, 51cm: 400mm, 54cm: 420mm, 56cm: 440mm SIZES 43, 47, 51, 54, 56cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano RS505 11-speed, hydraulic with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano 105 braze-on

REAR DERAILLEUR Shimano 105 11-speed long

CRANKSET FSA Gossamer Pro ABS Adventure BB386 EVO, 48/32T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET FSA BB386 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-32T

BRAKE LEVERS Shimano RS505, hydraulic

FRONT BRAKE Shimano RS505 hydraulic disc with 160mm rotor

WEIGHT 19.3lbs, 8.7Kg



REAR BRAKE Shimano RS505 hydraulic disc with 140mm rotor

SADDLE Prologo Kappa DEA2

SEATPOST Felt Fit Woman VR UHC Performance carbon fiber, Ø27.2mm x 330mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Fit Woman Variable Road VR19, tubeless ready, 19mm inner width, 23mm depth

FRONT HUB Felt Variable Road RSL3, sealed cartridge bearing, 12 x 100mm thru axle, Center Lock, 28H

REAR HUB Felt Variable Road RSL3, sealed cartridge bearing, 11-speed, 12 x 142mm thru axle, Center Lock, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Rubino Pro G+, folding, 700 x 28c

ACCESSORIES Carbon assembly paste, chain plate protector



FINISH Matte Aqua (Raspberry)

FRAME Felt Fit Woman Variable Road UHC
Performance carbon fiber, MMC with InsideOut
construction, BB386 bottom bracket shell,
12 x 142mm with Syntace style thru axle,
flat mount disc brake standard, replaceable
rear derailleur hanger, internal mechanical or
electronic cable routing

FORK Felt Fit Woman Variable Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 56cm: No.42, 1.125 - 1.5"

STEM Felt Fit Woman VR OS SuperLite, ±6° rise, Ø35mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR Felt Fit Woman VR OS SuperLite Road VariableShape, short 65mm reach, 125mm drop, Ø35mm, 43cm: 360mm, 47cm: 380mm, 51cm: 400mm, 54cm: 420mm, 56cm: 440mm SIZES

43, 47, 51, 54, 56cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end pluss

SHIFTERS Shimano RS405 10-speed, hydraulic with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano Tiagra braze-on

REAR DERAILLEUR Shimano Tiagra 10-speed long

CRANKSET FSA Omega Adventure BB386 EVO, 48/32T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm

 ${\bf BOTTOM\ BRACKET\ FSA\ BB386\ with\ 30mm\ bearings}$

CHAIN KMC X-10. 10-speed

FREEWHEEL/CASSETTE Shimano 10-speed, 11-32T

 $\textbf{BRAKE LEVERS} \; \textbf{Shimano RS405}, \, \textbf{hydraulic}$

FRONT BRAKE Shimano RS405 hydraulic disc with 160mm rotor

WEIGHT 19.7lbs. 8.9Ka

REAR BRAKE Shimano RS405 hydraulic disc with 140mm rotor

SADDLE Felt Fit Woman Variable Road

SEATPOST Felt Fit Woman VR UHC Performance carbon fiber, Ø27.2mm x 330mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Fit Woman Variable Road VR19, tubeless ready, 19mm inner width, 23mm depth

FRONT HUB Felt Variable Road RSL3, 12 x 100mm thru axle, Center Lock, 28H

REAR HUB Felt Variable Road RSL3, 10/11-speed, 12 x 142mm thru axle, Center Lock, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro Folding, 700 x 28c

ACCESSORIES Carbon assembly paste, chain plate protector

VR40W



FINISH Matte Fiesta Red (Peach)

FRAME Felt Fit Woman Variable Road Disc FLite custom butted aluminum, hydroform smooth welded construction, BB386 bottom bracket shell, 12 x 142mm with Syntace style thru axle, flat mount disc brake standard, replaceable rear derailleur

hanger, internal mechanical cable routing

FORK Felt Fit Woman Variable Road UHC Advanced carbon fiber monocoque construction, size specific ControlTaper carbon fiber steerer tube, integrated crown race, crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21, 1.125", 56cm: No.42, 1.125 - 1.5"

STEM Felt Fit Woman VR OS SuperLite, ±6° rise, Ø35mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR Felt Fit Woman VR OS SuperLite Road VariableShape, short 65mm reach, 125mm drop, Ø35mm, 43cm: 360mm, 47cm: 380mm, 51cm: 400mm, 54cm: 420mm, 56cm: 440mm SIZES

43, 47, 51, 54, 56cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano RS405 10-speed, hydraulic with Felt Elite sealed derailleur cable and housing

FRONT DERAILLEUR Shimano Tiagra clamp-on, Ø34.9mm

REAR DERAILLEUR Shimano Tiagra 10-speed long

CRANKSET FSA Vero Pro Adventure BB386 EVO, 48/32T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET FSA BB386 with 30mm bearings and 19mm reducers

CHAIN KMC X-10, 10-speed

FREEWHEEL/CASSETTE Shimano 10-speed, 11-32T

BRAKE LEVERS Shimano Tiagra

WEIGHT

21.3lbs, 9.6Kg



FRONT BRAKE Rever CX1 flat mount dual movement disc with 160mm rotor

REAR BRAKE Rever CX1 flat mount dual movement disc with 160mm rotor

SADDLE Felt Fit Woman Variable Road

SEATPOST Felt Fit Woman VR UHC Performance carbon fiber, Ø27.2mm x 330mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt Fit Woman Variable Road VR19, tubeless ready, 19mm inner width, 23mm depth

FRONT HUB Felt Variable Road RSL3, 12 x 100mm thru axle, 6-Bolt, 28H

REAR HUB Felt Variable Road RSL3, 11-speed, 12 x 142mm thru axle, 6-bolt, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro Folding, 700x28c



Matte Shell Blue (Fiesta Red)

FRAME Felt Fit Woman Variable Road Disc FLite custom butted aluminum, Dynaform smooth welded construction, BSA threaded bottom bracket shell, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical cable routing

FORK Felt Fit Woman Variable Road UHC Advanced carbon fiber blades, size specific ControlTaper aluminum steerer tube, carbon dropouts

HEADSET FSA threadless with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, 43 - 47cm: IS-21 integrated sealed cartridge bearing, 1.125", 51 - 56cm: No.42B-CUP retainer bearing, 1.125 - 1.5"

STEM Felt Fit Woman VR SuperLite, ±7° rise, Ø31.8mm, 43cm: 60mm, 47cm: 80mm, 51cm: 90mm, 54 - 56cm: 100mm

HANDLEBAR Felt Fit Woman VR SuperLite Road, 86mm reach, 130mm drop, Ø31.8mm, 45 - 51cm: 42/45cm, 54cm: 44/47cm, 56cm: 46/49cm

SIZES

43, 47, 51, 54, 56cm

GRIPS Felt VelvetGel tape with 3M reflective base with reflective Felt Bubble-Tech F-Wing bar end

SHIFTERS Shimano Claris R2000 8-speed

FRONT DERAILLEUR Shimano Claris clamp-on, Ø31.8mm

REAR DERAILLEUR Shimano Claris 8-speed short

CRANKSET FSA Tempo Adventure 3-piece, 48/32T, 43 - 47cm: 165mm, 51cm: 170mm, 54 - 56cm: 172.5mm

BOTTOM BRACKET Sealed cartridge, BSA threaded, square taper axle, 68 x 120mm

CHAIN KMC 8-speed

FREEWHEEL/CASSETTE Shimano 8-speed, 12-32T

BRAKE LEVERS Shimano Claris R2000 with secondary top mount levers

WEIGHT

22.4lbs, 10.2Kg

FRONT BRAKE Promax flat mount dual movement disc with 160mm rotor

REAR BRAKE Promax flat mount dual movement disc with 160mm rotor

SADDLE Felt Fit Woman Variable Road

SEATPOST Felt Fit Woman SuperLite Road, Ø27.2mm x 330mm length

SEATPOST CLAMP Felt single bolt, Ø31.8mm

RIMS/WHEELSET Felt Fit Woman Variable Road VR19, tubeless ready, 19mm inner width, 23mm depth

FRONT HUB Felt Variable Road RSL3, 100mm QR, 6-bolt, 28H

REAR HUB Felt Variable Road RSL3 Disc, 8/9/10-speed, 135mm QR, 6-Bolt, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro, 700 x 28c



IA SERIES

The IA is the most aerodynamic bicycle in the world. Designed specifically for triathlon racing at the highest level of competition, the IA was developed using computational fluid dynamics (CFD) software and countless hours of testing in the wind tunnel. The IA also boasts a heretofore-unseen level of integration that includes an intuitive nutrition storage solution, user-friendly internal cable and wire routing and a cockpit design that offers a fit range to accommodate the needs of all athletes without sacrificing one gram of aerodynamic drag. The IA has propelled Felt professional athletes to victories at the Kona World Championship four years in a row. Best of all, Felt has adapted the IA's revolutionary aerodynamic efficiency across a diverse line to give every triathlete their fastest bike split ever.



IAFRD IA2



FINISH

Matte TeXtreme (White)

FRAME Felt Integrated Aero Tri UHC Ultimate + TeXtreme carbon fiber, MMC with InsideOut construction, BB30 bottom bracket shell, horizontal dropouts with integrated dropout adjusters, fully integrated proprietary braking system, internal mechanical or electronic cable routing

FORK Felt Dagger UHC Ultimate + TeXtreme carbon fiber monocoque construction, 1.125" carbon fiber steerer, brake covers, blades, dropouts, and crown; fully integrated proprietary braking system

HEADSET FSA TH-873-CB integrated, 1.125" sealed ceramic ACB cartridge bearings with Felt compression device

STEM Felt Dagger

HANDLEBAR Felt Dagger UHC Ultimate + Nano base bar with Felt f-Bend carbon fiber 3-position extensions

GRIPS Felt VelvetGel tape and dimpled gel pads with Felt bar end plugs

SHIFTERS Shimano Dura-Ace Di2 R9160 TT/Tri 11-speed

48, 51, 54, 56, 58cm

FRONT DERAILLEUR Shimano Dura-Ace R9150 Di2 braze-on

REAR DERAILLEUR Shimano Dura-Ace R9150 Di2 11-speed

CRANKSET Shimano Dura-Ace R9100, 52/36T, 48 -51cm: 165mm, 54 -56cm: 170mm. 58cm: 172.5mm

BOTTOM BRACKET CeramicSpeed BB30 with 24mm bearings

CHAIN Shimano Dura-Ace.11-speed

FREEWHEEL/CASSETTE Shimano Dura-Ace,

BRAKE LEVERS Shimano Dura-Ace R9160 TT/Tri

FRONT BRAKE Felt Aero Brake System with integrated cover

REAR BRAKE Felt Aero Brake System with integrated cover with Felt Super-Slick brake cable with Link housing

SADDLE ISM PS1.0 Ti

WEIGHT

18.1lbs. 8.2Ka



SEATPOST Felt Vibration Reducing Aero Tri UHC Ultimate + TeXtreme carbon fiber with 3T DiffLock Comfort Module internals, 300mm length

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts

RIMS/WHEELSET Zipp 404 NSW carbon

FRONT HUB Zipp Cognition, 100mm QR

REAR HUB Zipp Cognition, 11-speed, 130mm QR

SPOKES CX-Ray - Black

TIRES Continental Grand Prix 4000 S II folding, 700 x 23c

ACCESSORIES Carbon assembly paste, aero seat post slot covers, IA CALpac 2.0, Di2 Internal battery charging cables, Dagger stem cover with 1/4-turn Garmin Mount, valve extenders, IA BTSpac storage hox

FINISH

Matte Carbon (Blue, Magenta Fade)

FRAME Felt Integrated Aero Tri UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, BB30 bottom bracket shell, horizontal dropouts with integrated dropout adjusters, fully integrated proprietary braking system, internal mechanical or electronic cable routing

FORK Felt Dagger UHC Advanced carbon fiber monocoque construction, 1.125" carbon fiber steerer, brake covers, blades, dropouts, and crown; fully integrated proprietary braking system

HEADSET FSA IS integrated, 1.125" sealed ACB cartridge bearings with Felt compression device

STEM Felt Dagger

HANDLEBAR Felt Dagger UHC Ultimate + Nano base bar with Felt f-Bend 3-position extensions

GRIPS Felt VelvetGel tape and dimpled gel pads with Felt bar end plugs

SHIFTERS SRAM RED eTap 11-speed wireless

48, 51, 54, 56, 58cm

FRONT DERAILLEUR SRAM RED eTap braze-on

REAR DERAILLEUR SRAM RED eTap 11-speed

CRANKSET Quarg Prime Carbon, 52/36T.

48 -51cm: 165mm, 54 -56cm: 170mm, 58cm: 172.5mm

BOTTOM BRACKET Token BB30 with 22/24mm

CHAIN SRAM 11-speed

FREEWHEEL/CASSETTE SRAM 11-speed, 11-28T

BRAKE LEVERS SRAM 500 Aero

FRONT BRAKE Felt Aero Brake System with integrated cover

REAR BRAKE Felt Aero Brake System with integrated cover with Felt Super-Slick brake cable with Link housing

SADDLE ISM PS1.0

WEIGHT

20.3lbs. 9.2Ka

SEATPOST Felt Vibration Reducing Aero Tri UHC Advanced carbon fiber with 3T DiffLock Comfort Module internals, 300mm length

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts

RIMS/WHEELSET Zipp 30 Course clincher, tubeless ready


FRONT HUB Devox TTR3, sealed cartridge bearing, 100mm QR, 24H

REAR HUB Devox TTR3, sealed cartridge bearing, 11-speed, 130mm QR, 28H

SPOKES Aero stainless steel

seat post slot covers, IA CALpac 2.0, SRAM eTap PowerPack, Dagger stem cover with 1/4-turn Garmin Mount, valve extenders, IA BTSpac







IA10 IA16



FINISH

Matte Carbon (Pewter, Charcoal)

FRAME Felt Integrated Aero Tri UHC Performance carbon fiber, MMC with InsideOut construction, BB30 bottom bracket shell, horizontal dropouts with integrated dropout adjusters, aerodynamically optimized for direct mount rear brake, internal mechanical or electronic cable routing

FORK Felt IA UHC Advanced carbon fiber monocoque construction, 1.125" carbon fiber steerer, blades, dropouts, crown; aerodynamically optimized for a conventional brake

HEADSET FSA IS integrated, 1.125" sealed ACB cartridge bearings with Felt compression device

STEM Felt Tri155, -6° rise, Ø31.8mm, 90mm

HANDLEBAR Felt Bayonet 3 base bar with Felt *f*-Bend 3-position extensions, Ø31.8mm, 48 - 51cm: 390mm, 54 - 58cm: 420mm

GRIPS Felt VelvetGel tape, Felt Tri Tip grips and dimpled gel pads with Felt bar end plugs

SHIFTERS Shimano Dura-Ace Di2 R9160 TT/Tri 11-speed SIZES

48, 51, 54, 56, 58cm

FRONT DERAILLEUR Shimano Ultegra R8050 Di2 braze-on

REAR DERAILLEUR Shimano Ultegra R8050 Di2 11-speed short cage

CRANKSET Vision TriMax Pro TT BB30, 52/36T, 48 -51cm: 165mm, 54 -56cm: 170mm, 58cm: 172.5mm

BOTTOM BRACKET FSA BB30 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano Dura-Ace R9160 TT/Tri

FRONT BRAKE Vision TriMax Aero caliper

REAR BRAKE Shimano BR5810 direct mount caliper

SADDLE ISM PS1.0

WEIGHT

20.7lbs, 9.4Kg



SEATPOST Felt Vibration Reducing Aero Tri UHC Advanced carbon fiber with 3T DiffLock Comfort Module internals, 300mm length

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts

RIMS/WHEELSET Devox 35A, tubeless ready, 17mm width, 35mm depth

FRONT HUB Devox TTR3, sealed cartridge bearing, 100mm QR, 24H

REAR HUB Devox TTR3, sealed cartridge bearing, 11-speed, 130mm QR, 28H

SPOKES Aero stainless steel

TIRES Felt Aero TTR2 folding, 700 x 23c

ACCESSORIES Carbon assembly paste, aero seat post slot covers, IA CALpac 2.0, Di2 Internal battery charging cables, IA BTSpac storage box



Matte Carbon (Red, White)

FRAME Felt Integrated Aero Tri UHC Performance carbon fiber, MMC with InsideOut construction, BB30 bottom bracket shell, horizontal dropouts with integrated dropout adjusters, aerodynamically optimized for direct mount rear brake, internal mechanical or electronic cable routing

FORK Felt IA UHC Advanced carbon fiber monocoque construction, 1.125" carbon fiber steerer, blades, dropouts, crown; aerodynamically optimized for a conventional brake

HEADSET FSA IS integrated, 1.125" sealed ACB cartridge bearings with Felt compression device

STEM Felt Tri155, -6° rise, Ø31.8mm, 90mm

HANDLEBAR Felt Bayonet 3 base bar with Felt *f*-Bend 3-position extensions, Ø31.8mm, 48 - 51cm: 390mm --- 54 - 58cm: 420mm

GRIPS Felt VelvetGel tape, Felt Tri Tip grips and dimpled gel pads with Felt bar end plugs

SHIFTERS microSHIFT TT 11-speed

SIZES

48, 51, 54, 56, 58cm

FRONT DERAILLEUR Shimano 105 braze-on

REAR DERAILLEUR Shimano 105 11-speed short cage

CRANKSET FSA 0mega BB30, 52/36T, 48 -51cm: 165mm, 54 -56cm: 170mm, 58cm: 172.5mm

BOTTOM BRACKET FSA BB30 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed,

BRAKE LEVERS Aero TT/Tri

FRONT BRAKE Dual pivot caliper

REAR BRAKE Aero direct mount caliper

SADDLE ISM PS1.1

WEIGHT 20 4lhs 9

20.4lbs, 9.3Kg

SEATPOST Felt Vibration Reducing Aero Tri UHC Advanced carbon fiber with 3T DiffLock Comfort Module internals, 300mm length

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts

RIMS/WHEELSET Devox 30A, tubeless ready, 17mm width, 27mm depth

FRONT HUB Devox TTR4, 100mm QR, 24H

REAR HUB Devox TTR3, sealed cartridge bearing, 11-speed, 130mm QR, 28H

SPOKES 2.0mm stainless steel

 $\textbf{TIRES} \; \text{Felt Aero TTR2 folding, } 700 \; \text{x} \; 23c$

ACCESSORIES Carbon assembly paste, aero seat post slot covers, IA CALpac 2.0, IA BTSpac storage box



IAFRD Frameset



FINISH Matte TeXtreme (White)

48, 51, 54, 56, 58cm

WEIGHT 6.9lbs, 3.1Kg



FRAME Felt Integrated Aero Tri UHC Ultimate + TeXtreme carbon fiber, MMC with InsideOut construction, BB30 bottom bracket shell, horizontal dropouts with integrated dropout adjusters, fully integrated proprietary braking system, internal mechanical or electronic cable routing

FORK Felt Dagger UHC Ultimate + TeXtreme carbon fiber monocoque construction, 1.125" carbon fiber steerer, brake covers, blades, dropouts, and crown; fully integrated proprietary braking system

HEADSET FSA TH-873-CB integrated, 1.125" sealed ceramic ACB cartridge bearings with Felt compression device

STEM Felt Dagger

 $\begin{array}{l} \textbf{HANDLEBAR} \ \text{Felt Dagger UHC Ultimate} + \text{Nano} \\ \text{base bar with Felt } f\text{-Bend carbon fiber 3-position} \\ \text{extensions} \end{array}$

GRIPS Dimpled gel pads with Felt bar end plugs

FRONT BRAKE Felt Aero Brake System with integrated cover

REAR BRAKE Felt Aero Brake System with integrated cover

SEATPOST Felt Vibration Reducing Aero Tri UHC Ultimate + TeXtreme carbon fiber with 3T DiffLock Comfort Module internals, 300mm length

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts

ACCESSORIES Carbon assembly paste, aero seat post slot covers, IA CALpac 2.0, Dagger stem cover with 1/4-turn Garmin Mount, valve extenders, IA BTSpac storage box



FINISH
Matte Carbon (Charcoal, White)

48, 51, 54, 56, 58cm

WEIGHT TBA



FRAME Felt Integrated Aero Tri UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, BB30 bottom bracket shell, horizontal dropouts with integrated dropout adjusters, fully integrated proprietary braking system, internal mechanical or electronic cable routing

FORK Felt Dagger UHC Advanced carbon fiber monocoque construction, 1.125" carbon fiber steerer, brake covers, blades, dropouts, and crown; fully integrated proprietary braking system

HEADSET FSA IS integrated, 1.125" sealed ACB cartridge bearings with Felt compression device

STEM Felt Dagger

HANDLEBAR Felt Dagger UHC Ultimate + Nano base bar with Felt f-Bend 3-position extensions

 $\ensuremath{\mathsf{GRIPS}}$ Dimpled gel pads with Felt bar end plugs

FRONT BRAKE Felt Aero Brake System with integrated cover

REAR BRAKE Felt Aero Brake System with integrated cover

SEATPOST Felt Vibration Reducing Aero Tri UHC Advanced carbon fiber with 3T DiffLock Comfort Module internals, 300mm length

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts

ACCESSORIES Carbon assembly paste, aero seat post slot covers, IA CALpac 2.0, Dagger stem cover with 1/4-turn Garmin Mount, valve extenders, IA BTSpac storage box

IA10 Frameset



FINISH

Matte Carbon (White)

SIZES 48, 51, 54, 56, 58cm

WEIGHT 7.1lbs, 3.2Kg



FRAME Felt Integrated Aero Tri UHC Performance carbon fiber, MMC with InsideOut construction, BB30 bottom bracket shell, horizontal dropouts with integrated dropout adjusters, aerodynamically optimized for direct mount rear brake, internal mechanical or electronic cable routing

FORK Felt IA UHC Advanced carbon fiber monocoque construction, 1.125" carbon fiber steerer, blades, dropouts, crown; aerodynamically optimized for a conventional brake

HEADSET FSA IS integrated, 1.125" sealed ACB cartridge bearings with Felt compression device

STEM Felt Tri155, -6° rise, Ø31.8mm, 90mm

SEATPOST Felt Vibration Reducing Aero Tri UHC Advanced carbon fiber with 3T DiffLock Comfort Module internals, 300mm length

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts

ACCESSORIES Electric wire and mechanical cable grommets, Carbon assembly paste, aero seat post slot covers, IA CALpac 2.0, Felt headset upper cap, IA BTSpac storage box





TT/TRI

The DA has long been a favorite among triathletes and time trialists the world over. The latest edition of Felt's perennial time trial bike remains UCI-legal for all competitions, and includes the innovative vibration-reducing, aerodynamic seatpost design made popular by Felt's AR aero road bike series. Its integrated front end makes for a high level of adjustment that can accommodate a wide range of cockpit solutions and fit needs. Ideal for any TT or triathlon course, the DA is the ultimate weapon of choice for riders looking to beat the clock. Featuring many of the aerodynamic benefits of the iconic DA time trial bike, both the B Series and S Series offers triathletes and time trialists another option for achieving their fastest ride ever. Crafted using industry-leading materials expertise and incorporating several of the aerodynamically optimized tube shapes developed for Felt's most technologically advanced bikes, these models come complete with highly functional component selections that make them ready to race right from the start.

DA1 Frameset



FINISH

Matte TeXtreme (Charcoal, White)

51, 54, 56, 58cm

WEIGHT

6.3lbs, 2.8Kg

FRAME Felt Defined Aero TT/Tri UHC Ultimate + TeXtreme carbon fiber, MMC with InsideOut construction, BB30 bottom bracket shell, horizontal dropouts with integrated dropout adjusters, fully integrated proprietary braking system. internal mechanical or electronic cable routing

FORK Felt Bayonet 4 UHC Ultimate + TeXtreme carbon fiber monocoque construction, carbon fiber brake cover, blades, dropouts, and crown with Felt compression device

HEADSET Felt Bayonet 4 integrated, 19mm sealed cartridge bearing

STEM Felt Bayonet 4 Fixed Position, 90 x 0mm, Ø31.8mm and 70 x 30mm,

FRONT BRAKE Felt Aero Brake System with integrated cover

REAR BRAKE Felt Aero TT/Tri, integrated

SEATPOST Felt DA/B Aero UHC Advanced + TeXtreme carbon fiber, 350mm length

SEATPOST CLAMP Felt Internaloc integrated with titanium bolts



B14 \$32



FINISH

Matte Obsidian (Teal)

FRAME Felt Aero TT/Tri UHC Performance carbon fiber, MMC with InsideOut construction, BB30 bottom bracket shell, horizontal dropouts with integrated dropout adjusters, internal mechanical or electronic cable routing

FORK Felt Aero TT/Tri UHC Performance carbon fiber blades and dropouts, 1.125" aluminum steerer tube

HEADSET FSA IS-21 integrated, 1.125" integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap

STEM Devox Tri, ±17° rise, Ø31.8mm, 47cm (650c): 60mm, 51cm: 80mm, 54 - 56cm: 90mm, 58cm: 100mm, 61cm: 110mm

HANDLEBAR DEVOX Bayonet 3 base bar with DEVOX *f*-Bend 3-position extensions, Ø31.8mm, 48 - 51cm: 390mm, 54 - 58cm: 420mm, 61cm: 440mm

SIZES

47cm (650c), 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape, Felt Tri Tip grips and dimpled gel pads with Felt bar end plugs

SHIFTERS microSHIFT TT 11-speed

FRONT DERAILLEUR Shimano Ultegra R8000 braze-on

REAR DERAILLEUR Shimano Ultegra R8000 11-speed short cage

CRANKSET FSA Omega Compact BB30, 50/34T, 47 (650c): 165mm, 51cm: 167.5mm, 54 - 56cm: 170mm, 58 - 61cm: 172.5mm

BOTTOM BRACKET FSA BB30 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed,

BRAKE LEVERS Aero TT/Tri

WEIGHT

20.6lbs, 9.4Kg



FRONT BRAKE Dual pivot caliper

REAR BRAKE TRP T822 TT direct mount caliper brake

SADDLE Prologo Nago Evo Tri40 T2.0

SEATPOST Felt DA/B Aero UHC Advanced carbon fiber, 350mm length

SEATPOST CLAMP Felt Aero Integrated DA/B

RIMS/WHEELSET Devox 30A, tubeless ready, 17mm width. 27mm depth

FRONT HUB Devox TTR4, 100mm QR, 24H

REAR HUB Devox TTR3, sealed cartridge bearing, 11-speed, 130mm QR, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro Pro Slick folding, 700 x 23c, 47cm: Vittoria Rubino G+ 650 x 23c

ACCESSORIES Carbon assembly paste



FINISH Black (Red, White)

FRAME Felt TT/Tri AeroLite custom butted aluminum, Dynaform smooth welded construction, machined BSA threaded bottom bracket shell, horizontal dropouts with integrated dropout adjusters, internal cable routing

FORK Felt Aero TT/Tri UHC Performance carbon fiber blades and dropouts, 1.125" aluminum steerer tube

HEADSET FSA IS-21 integrated, 1.125" integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap

STEM Devox Tri, ±6° rise, Ø31.8mm, 47cm (650c): 60mm, 51cm: 80mm, 54 - 56cm: 90mm, 58cm: 100mm, 61cm: 110mm

HANDLEBAR DEVOX Bayonet 3 base bar with DEVOX f-Bend 3-position extensions, Ø31.8mm, 48 - 51cm: 390mm, 54 - 58cm: 420mm, 61cm: 440mm

SIZES

47 (650c), 51, 54, 56, 58, 61cm

GRIPS Felt VelvetGel tape, Felt Tri Tip grips and dimpled gel pads with Felt bar end plugs

SHIFTERS microSHIFT TT 11-speed

FRONT DERAILLEUR Shimano 105 braze-on

REAR DERAILLEUR Shimano 105 11-speed short cage

CRANKSET FSA Vero Compact, 50/34T, 47 (650c): 165mm, 51cm: 167.5mm, 54 - 56cm: 170mm, 58 - 61cm: 172.5mm

BOTTOM BRACKET Sealed cartridge, BSA threaded, square taper axle, 68 x 103mm

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Aero TT/Tri

21.2lbs, 9.6Kg

WEIGHT

FRONT BRAKE Dual pivot caliper

REAR BRAKE TRP T822 TT direct mount caliper brake

SADDLE Devox TT

SEATPOST Felt Road SL seat post, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Devox 24A, 17mm width, 24mm depth

FRONT HUB Devox TTR4, 100mm QR, 28H

REAR HUB Devox TTR3, sealed cartridge bearing, 11-speed, 130mm QR, 32H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro Slick, 700 x 23c, 47cm: Vittoria Rubino III, 650 x 23c



TRACK SERIES

The Felt TA FRD is the most advanced track bike the world has ever seen. Featuring a breakthrough, asymmetrical airfoil design and a revolutionary left-hand drive system, the TA FRD has won both World Championship and Olympic medals. The TA FRD also features a level of integration that is rivaled only by its groundbreaking level of performance, and because of this integration, each TA FRD is tailored to the specific fit of each individual rider. The TK Series track bikes have been ridden to world championships and Olympic medals, and they're ideal for both the sport's top athletes and anyone looking to experience the thrill of racing inside the velodrome.

TAFRD TK1



FINISH Matte Black (White) SIZES TBA WEIGHT TBA



FRAME Felt Track Aero, UHC Ultimate + TeXtreme carbon fiber

FORK FFelt TA FRD, UHC Ultimate + TeXtreme carbon fiber

AEROBAR Felt TA FRD, UHC Ultimate + TeXtreme carbon fiber

 $\begin{tabular}{ll} \textbf{SEATPOST} & \textbf{Felt TA FRD, UHC Ultimate} & + \textbf{TeXtreme} \\ \textbf{carbon fiber} \\ \end{tabular}$

CRANKS Proprietary "Race" Vision Metron Track with Stages Cycling power meter & proprietary "Train" Vision Track

CHAINRINGS Proprietary "Race" Vision Metron Track & proprietary "Train" Vision Track

WHEELSETS Proprietary "Race" HED Volo Track Discs with CeramicSpeed Coated bearings & proprietary "Train" HED Stinger 6 with proprietary Phil Wood Track Hubs

BOTTOM BRACKET CeramicSpeed BB30 Coated



FINISH

Matte Carbon Shadow (Silver, Fluoro Red)

FRAME Felt Aero Track UHC Advanced +

Nano carbon fiber, MMC with InsideOut

bracket shell, horizontal dropouts with titanium surfaces, integrated chain tensioners

FORK Felt Aero Track UHC Advanced carbon fiber

monocoque construction, 1.125" carbon fiber

steerer tube, crown, blades and dropouts with

STEM 3T Team Stem with titanium bolts, ±10° rise,

Ø31.8mm, 51 - 54cm: 85mm, 56 - 61cm: 100mm

Ø31.8mm, 51-54cm: 350mm, 56 - 61cm: 370mm

HANDLEBAR 3T SCATTO LTD carbon fiber,

aluminum steerer tube plug and integrated

HEADSET FSA IS integrated, 1.125"

sealed cartridge bearing with custom

TK1 cone spacer, Felt top cap

compression device

construction, BSA threaded bottom

SIZES 52, 55, 57, 60cm

GRIPS Felt VelvetGel tape with Felt Bubble-Tech F-Wing bar end plugs CRANKSET Rotor 3D24 TRACK, 49T x 1/8"

chainring 144mm BCD, 52cm: 165mm, 55cm: 167.5mm, 57 - 60cm: 170mm

BOTTOM BRACKET Rotor BSA Track with 24mm bearings

CHAIN KMC X101 1-speed 1/8"

FREEWHEEL/CASSETTE 15T x 1/8" with lockring

SADDLE Prologo Zero II CPC TiRox

SEATPOST Felt Tk1 UHC Advanced carbon fiber with 3T DiffLock internals

SEATPOST CLAMP Felt Aero Integrated Tk1

WEIGHT 15.1lbs, 6.8Kg

RIMS/WHEELSET Felt TkR1 tubular by Reynolds, 62mm depth

FRONT HUB Felt TkR1, sealed cartridge bearing, 100mm with track nuts, 24H

REAR HUB Felt TkR1, sealed cartridge bearing, double-threaded fixed / fixed, 120mm with track nuts, 24H

SPOKES Bladed double butted stainless steel with aluminum spoke nipples

TIRES Challenge Pista Ultra, I 1000+tpi Silk casing, 700x22c

ACCESSORIES Carbon assembly paste, Vittoria Mastik One tubular glue, Reynolds valve extender TK2 TK3



FINISH

Matte Black (Shadow, Silver, Blue)

FRAME Felt Aero Track UltraLite custom butted aluminum, hydroform smooth welded construction, BSA threaded bottom bracket shell, horizontal dropouts with cast steel surfaces

FORK Felt Aero Track UHC Performance carbon fiber blades and dropouts, 1.125" aluminum steerer tube

HEADSET FSA IS-21 integrated, 1.125" sealed cartridge bearing with aluminum 9mm cone spacer, Felt top cap

STEM 3T Pro Stem, ±6° rise, Ø31.8mm, 51 - 54cm: 85mm, 56 - 61cm: 100mm

HANDLEBAR Felt TKR-MSO, Ø31.8mm, 51cm: 360mm, 54 - 58cm: 390mm, 61cm: 420mm

SIZES

51, 54, 56, 58, 61cm

GRIPS Felt Gel tape with Felt Bubble-Tech F-Wing bar end plugs

CRANKSET SRAM Omnium GXP, 48T x 1/8" chainring 144mm BCD, 51 - 54cm: 165mm, 56cm: 167.5mm, 58 - 61cm: 170mm

BOTTOM BRACKET Felt TkR BSA Track 68mm with 22/24mm bearings by Token

CHAIN KMC Z510HX 1-speed 1/8"

FREEWHEEL/CASSETTE 15T x 1/8" with lockring

SADDLE Prologo Zero II T2.0

SEATPOST 3T STILO, Ø27.2mm x 350mm

WEIGHT

16.4lbs, 7.4Kg



SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET MAVIC ELLIPSE Clincher

FRONT HUB Mavic, QRM+ sealed cartridge bearing, 20H

REAR HUB Mavic, QRM+ sealed cartridge bearing, double-threaded fixed/fixed, 20H

SPOKES Bladed double butted stainless steel

TIRES Challenge Pista OT, 320tpi, 700c x 23c

ACCESSORIES Carbon assembly paste



FRAME Felt Aero Track UltraLite custom butted aluminum, hydroform smooth welded construction, BSA threaded bottom bracket shell, horizontal dropouts with cast steel surfaces

FORK Felt Aero Track UHC Performance carbon fiber blades and dropouts, 1.125" aluminum steerer tube

HEADSET FSA IS-21 integrated, 1.125" sealed cartridge bearing with aluminum 9mm cone spacer, Felt top cap

STEM Felt SuperLite, ±7° rise, Ø26.0mm, 43cm (650c): 80mm; Ø31.8mm, 51cm: 80mm, 54cm: 90mm, 56 - 61cm: 100mm

HANDLEBAR Felt TK:K1,Ø26.0mm, 43cm (650c): 75mm reach, 120mm drop, 360mm; Felt TKR-MS0, Ø31.8mm, 51cm: 360mm, 54 - 58cm: 390mm, 61cm: 420mm; Felt

SIZES

43 (650c), 51, 54, 56, 58, 61cm

GRIPS Felt Gel tape with Felt Bubble-Tech F-Wing bar end plugs

CRANKSET Felt Track, 48T x 3/32" chainring 144mm BCD, 43cm (650c): 155mm, 51 - 54cm: 165mm, 56cm: 167.5mm, 58 - 61cm: 170mm

BOTTOM BRACKET Sealed cartridge, BSA threaded, square taper axle, 68 x 110mm

CHAIN KMC Z610HX 1-speed 3/32"

FREEWHEEL/CASSETTE 15T x 3/32" with lockring

SADDLE Felt SuperLite; 43 (650c): Felt K:1 SuperLite

SEATPOST Felt TkR, Ø27.2mm x 300mm

WEIGHT

17.7lbs, 8.1Kg



SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt TkR4, 19mm inner width, 30mm depth

FRONT HUB Felt TkR4, sealed cartridge bearing, 100mm with track nuts, 28H

REAR HUB Felt TkR4, sealed cartridge bearing, double-threaded fixed / fixed, 120mm with track nuts, 28H

SPOKES 2.0mm stainless steel

TIRES Vittoria Zaffiro Slick, 700c x 23c; 43cm (650c): Vittoria Rubino III 650c x 23c



FINISH

Matte TeXtreme (Charcoal, Gloss White, Red)

SIZES 52, 55, 57, 60cm WEIGHT 5.8lbs, 2.6Kg



FRAME Felt Aero Track UHC Ultimate + TeXtreme carbon fiber, MMC with InsideOut construction, BSA threaded bottom bracket shell, horizontal dropouts with titanium surfaces, integrated chain tensioners

FORK Felt Aero Track UHC Ultimate + TeXtreme carbon fiber monocoque construction, Bayonet steerer tube, carbon fiber crown, blades and dropouts

HEADSET FSA IS integrated, 1.125" sealed cartridge bearing with custom TK cone spacer

STEM FELT Exclusive Adjustable TK External steerer Design, 2D Forge Aluminum. 12 Piece Design and included stem extensions (sizes listed below) 26mm x 40, 50, 65, 80, 95mm 31.8mm x 40, 65, 80, 95mm

SEATPOST Felt Tk1 carbon fiber with 3T DiffLock internals

SEATPOST CLAMP Felt Aero Integrated Tk1

ACCESSORIES Carbon assembly paste, 9 Stem Extensions



CROSS SERIES

Mud, rocks, snow, sweat and pain. That's cyclocross. The toughest racecourses demand the best equipment, and that's why Felt created the World Championship-winning Fx series. With geometry tuned for the demands of the world's best cyclocross racers, the Fx offers incredibly responsive handling, optimal pedaling stiffness and an oversize front triangle for easy shouldering when tackling technical run-up sections. The Fx series also boasts plenty of versatility thanks to its dual water bottle mounting locations and ample frame clearance that can accommodate most modern 'cross and adventure tires. Available in both high-performance carbon fiber and rugged aluminum, all Fx models feature disc brakes for maximum performance in any weather condition. Whatever the 'cross course throws your way, the Fx has you covered.



F1X F3X



FINISH

Matte TeXtreme (Aqua)

FRAME Felt Cyclocross UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, BB386 bottom bracket shell, 12 x 142mm Syntace style thru axle, shoulder friendly top tube, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical or electronic cable routing

FORK Felt Cyclocross UHC Ultimate + TeXtreme carbon fiber monocoque construction, ControlTaper 1.125" - 1.5" carbon fiber steerer tube, integrated crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, No.42, 1.125 - 1.5"

STEM 3T ARX II Team Stealth, ±6° rise, Ø31.8mm, 47 - 53cm: 90mm, 55cm: 100mm, 57cm: 110mm, 60cm: 120mm

HANDLEBAR 3T Ergoterra Team Stealth, 89mm reach, 128mm drop, Ø31.8mm, 47 - 50cm: 420/450mm, 53 - 60cm: 440/470mm SIZES

47, 50, 53, 55, 57, 60cm

GRIPS Felt CxGel tape with Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS SRAM Force Cx1, 1x11

REAR DERAILLEUR SRAM Force CX1, 11-speed medium cage

CRANKSET Quarq Prime Carbon, XSYNC 40T and 38T, 47cm: 165mm, 50cm: 170mm, 53cm: 172.5mm, 55 - 60cm: 175mm

BOTTOM BRACKET Token BB386 with 30mm bearings

CHAIN SRAM 11-speed

FREEWHEEL/CASSETTE SRAM 11-speed, 11-32T

BRAKE LEVERS SRAM Force Cx1, hydraulic

FRONT BRAKE SRAM Force Cx1 hydraulic disc flat mount with 160mm Centerline rotor

REAR BRAKE SRAM Force Cx1 hydraulic disc flat mount with 140mm Centerline rotor

WEIGHT 17.5lbs, 7.94Kg



SADDLE Prologo X0 TiRox

SEATPOST 3T Ionic 25 Team VR Stealth, Ø27.2mm x 350mm length

SEATPOST CLAMP 7075 CNC aluminum, titanium bolt and scandium nut, \emptyset 31.8mm

RIMS/WHEELSET DT Swiss F1850 tubeless ready, 18mm inner width, 23mm depth, 1650g (wheelset)

FRONT HUB DT Swiss 370, 100 x 12mm thru axle, 6-bolt, 24H

REAR HUB DT Swiss 370, 11-speed, 12 x 142mm thru axle, 6-bolt, 24H

SPOKES Front: DT Swiss Aerocomp 2.0/1.25/2.3 Bladed; Rear: DT Swiss New aero 2.0/1.2/3.0 (DS) and Aerocomp 2.0/1.0/2.8 (NDS)

TIRES Schwalbe X-One All Around MicroSkin TL-Easy, folding, 700 x 33c

ACCESSORIES Carbon assembly paste, chain plate protector, tubeless valve stems, extra chainring



FINISH

Matte TeXtreme (Eggshell)

FRAME Felt Cyclocross UHC Advanced
+ TeXtreme carbon fiber, MMC with InsideOut
construction, BB386 bottom bracket shell,
12 x 142mm Syntace style thru axle, shoulder
friendly top tube, flat mount disc brake standard,
replaceable rear derailleur hanger, internal
mechanical or electronic cable routing

FORK Felt Cyclocross UHC Ultimate + TeXtreme carbon fiber monocoque construction, ControlTaper 1.125" - 1.5" carbon fiber steerer tube, integrated crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap and aluminum bolt, No.42, 1.125 - 1.5"

STEM 3T ARX II Grey, ±6° rise, Ø31.8mm, 47 - 53cm: 90mm, 55cm: 100mm, 57cm: 110mm, 60cm: 120mm

HANDLEBAR 3T Ergoterra Pro, 89mm reach, 128mm drop, Ø31.8mm, 47 - 50cm: 420/450mm, 53 - 60cm: 440/470mm SIZES

47, 50, 53, 55, 57, 60cm

GRIPS Felt CxGel tape with Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano Ultegra R8000 11-speed

FRONT DERAILLEUR Shimano Ultegra R8000 clamp-on, Ø34.9mm

REAR DERAILLEUR Shimano Ultegra R8000 11-speed long cage

CRANKSET Shimano Ultegra R8000, 46/36T, 47cm: 165mm, 50cm: 170mm, 53cm: 172.5mm, 55 - 60cm: 175mm

BOTTOM BRACKET Token BB386 with 24mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano Ultegra R8000, hydraulic

FRONT BRAKE Shimano BR8070 hydraulic disc with 140mm rotor

WEIGHT 18.6lbs, 8.5Kg

REAR BRAKE Shimano BR8070 hydraulic disc with 140mm rotor

SADDLE Prologo Scratch X8 T2.0

SEATPOST 3T Ionic 25 Pro VR Stealth, Ø27.2mm x 350mm length

SEATPOST CLAMP Felt single bolt, Ø31.8mm

RIMS/WHEELSET DT Swiss P1850 Classic tubeless ready, 18mm inner width, 23mm depth, 1943g (wheelset)

FRONT HUB DT Swiss 370, 100 x 12mm thru axle, Center Lock, 24H

REAR HUB DT Swiss 370, 11-speed, 12 x 142mm thru axle, Center Lock, 24H

SPOKES DT Swiss Champion 2.0

TIRES Schwalbe X-One All Around MicroSkin TL-Easy, folding, 700 x 33c

ACCESSORIES Carbon assembly paste, chain plate protector, tubeless valve stems

F4X F5X



FINISH

Matte TeXtreme (Slime Green, Magenta)

FRAME Felt Cyclocross UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, BB386 bottom bracket shell, 12 x 142mm Syntace style thru axle, shoulder friendly top tube, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical or electronic cable routing

FORK Felt Cyclocross UHC Advanced + TeXtreme carbon fiber monocoque construction, ControlTaper 1.125" - 1.5" aluminum steerer tube, carbon fiber blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap and aluminum bolt, No.42, 1.125 - 1.5"

STEM Felt CXR SuperLite, ±7° rise, Ø31.8mm, 47 - 53cm: 90mm, 55cm: 100mm, 57cm: 110mm, 60cm: 120mm

HANDLEBAR Felt CXR SuperLite, 86mm reach, 130mm drop, Ø31.8mm, 47 - 50cm: 420/450mm, 53 - 60cm: 440 / 470mm

SIZES

47, 50, 53, 55, 57, 60cm

GRIPS Felt CxGel tape with Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS SRAM Rival Cx1, 1x11

REAR DERAILLEUR SRAM Force CX1 11-speed medium cage

CRANKSET SRAM S350 Cx1 GXP, XSYNC 40T, 47cm: 165mm, 50cm: 170mm, 53cm: 172.5mm, 55 - 60cm: 175mm

BOTTOM BRACKET Token BB386 with 22/24mm bearings

CHAIN SRAM 11-speed

FREEWHEEL/CASSETTE SRAM 11-speed, 11-32T

BRAKE LEVERS SRAM Rival Cx1, hydraulic

FRONT BRAKE SRAM Rival hydraulic disc flat mount with SRAM 160mm Centerline rotor

REAR BRAKE SRAM Rival hydraulic disc flat mount with SRAM 140mm Centerline rotor

WEIGHT

20.0lbs, 9.0Kg



SADDLE Prologo Nago X8 T2.0

SEATPOST Felt CxR2, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø31.8mm

RIMS/WHEELSET Novatec 30 Disc, tubeless ready

FRONT HUB Felt R2 Disc, sealed cartridge bearing, 100 x 12mm thru axle, 6-bolt, 24H

REAR HUB Felt R2 Disc, sealed cartridge bearing, 11-speed, 12 x 142mm thru axle, 6-bolt, 28H

SPOKES 2.0mm stainless steel with aluminum nipples

TIRES Schwalbe X-One All Around MicroSkin TL-Easy, folding, 700 x 33c

ACCESSORIES Carbon assembly paste, chain plate protector



FINISH

Matte TeXtreme (Gloss Black, Magenta)

FRAME Felt Cyclocross UHC Advanced
+ TeXtreme carbon fiber, MMC with InsideOut
construction, BB386 bottom bracket shell,
12 x 142mm Syntace style thru axle, shoulder
friendly top tube, flat mount disc brake standard,
replaceable rear derailleur hanger, internal
mechanical or electronic cable routing

FORK Felt Cyclocross UHC Advanced + TeXtreme carbon fiber monocoque construction, ControlTaper 1.125" - 1.5" aluminum steerer tube, carbon fiber blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap and aluminum bolt, No.42, 1.125 - 1.5"

STEM Felt CXR SuperLite, ±7° rise, Ø31.8mm, 47 - 53cm: 90mm, 55cm: 100mm, 57cm: 110mm, 60cm: 120mm

HANDLEBAR Felt CXR SuperLite, 86mm reach, 130mm drop, Ø31.8mm, 47 - 50cm: 420/450mm, 53 - 60cm: 440 / 470mm

SIZES

47, 50, 53, 55, 57, 60cm

GRIPS Felt CxGel tape with Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano RS505 11-speed

FRONT DERAILLEUR Shimano 105 clamp-on, Ø34.9mm

REAR DERAILLEUR Shimano 105 11-speed short cage

CRANKSET FSA Gossamer Pro ABS BB386, 46/36T, 47cm: 165mm, 50cm: 170mm, 53cm: 172.5mm. 55 - 60cm: 175mm

 ${\bf BOTTOM\ BRACKET\ FSA\ BB386\ with\ 30mm\ bearings}$

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano RS505, hydraulic

FRONT BRAKE Shimano RS505 hydraulic disc with 140mm rotor

WEIGHT 20.2lbs, 9.1Ka

REAR BRAKE Shimano RS505 hydraulic disc with 140mm rotor

SADDLE Prologo Nago Evo X10 T2.0

SEATPOST Felt CxR2, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø31.8mm

RIMS/WHEELSET Felt CxR3 Disc, tubeless ready, 17mm inner width, 24mm depth

FRONT HUB Felt R3 Disc, sealed cartridge bearing, 100 x 12mm thru axle, Center Lock, 24H

REAR HUB Felt R3 Disc, sealed cartridge bearing, 11-speed, 12 x 142mm thru axle, Center Lock, 28H

SPOKES 2.0mm stainless steel

TIRES Schwalbe X-One All Around MicroSkin TL-Easy, folding, 700 x 33c

ACCESSORIES Carbon assembly paste, chain plate protector

F30X F40X



FINISH

Matte Navy (Magenta, Silver)

FRAME Felt Cyclocross FLite custom butted aluminum, Dynaform smooth welded construction, BB386 bottom bracket shell, 12 x 142mm Syntace style thru axle, shoulder friendly top tube, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical cable routing

 $\begin{array}{l} \textbf{FORK} \ \ \text{Felt Cyclocross UHC Advanced carbon fiber} \\ \text{construction, ControlTaper 1.125"} - 1.5" \ \text{aluminum} \\ \text{steerer tube, carbon fiber blades, LR fender mounts,} \\ \text{flat mount disc standard, } 12 \times 100 \text{mm thru axle} \\ \end{array}$

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap and aluminum bolt, No.42, 1.125 - 1.5"

STEM 3T ARX II Grey, ±6° rise, Ø31.8mm, 47 - 53cm: 90mm, 55cm: 100mm, 57cm: 110mm, 60cm: 120mm

HANDLEBAR 3T Ergoterra Pro, 89mm reach, 128mm drop, Ø31.8mm, 47 - 50cm: 420/450mm, 53 - 60cm: 440/470mm

SIZES

47, 50, 53, 55, 57, 60cm

GRIPS Felt CxGel tape with Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano RS505 11-speed

FRONT DERAILLEUR Shimano 105 clamp-on, 034.9mm

REAR DERAILLEUR Shimano 105 11-speed short cage

CRANKSET Gossamer BB386 EV0, 46/36T, 47cm: 165mm, 50cm: 170mm, 53cm: 172.5mm, 55 - 60cm: 175mm

BOTTOM BRACKET FSA BB386 with 30mm bearings

CHAIN Shimano 11-speed

FREEWHEEL/CASSETTE Shimano 11-speed, 11-28T

BRAKE LEVERS Shimano RS505, hydraulic

FRONT BRAKE Shimano RS505 hydraulic disc with 140mm rotor

WEIGHT 20.9lbs. 9.5Kg

0.9ibs, 9.5kg



REAR BRAKE Shimano RS505 hydraulic disc with 140mm rotor

SADDLE Prologo Nago Evo X10 T2.0

SEATPOST 3T Ionic 25 Pro VR, Ø27.2mm x 350mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt CxR3 Disc, tubeless ready, 17mm inner width, 24mm depth

FRONT HUB Felt R3 Disc, sealed cartridge bearing, 100 x 12mm thru axle, Center Lock, 24H

REAR HUB Felt R3 Disc, sealed cartridge bearing, 11-speed, 12 x 142mm thru axle, Center Lock, 28H

SPOKES 2.0mm stainless steel

TIRES Schwalbe X-One All Around Performance, folding, 700 x 33c



FINISH

routing

No.42, 1.125 - 1.5"

Matte Cyan (Red, Black)

FRAME Felt Cyclocross FLite custom butted

aluminum, Dynaform smooth welded construction,

BB386 bottom bracket shell, shoulder friendly top

tube, flat mount disc brake standard, replaceable

rear derailleur hanger, internal mechanical cable

FORK Felt Cyclocross UHC Advanced carbon fiber

flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing

with Felt VariableHeight Cone Spacers (20mm PC,

4.5mm aluminum), Felt top cap and aluminum bolt,

STEM Felt CXR SuperLite, ±7° rise, Ø31.8mm,

HANDLEBAR Felt CXR SuperLite, 86mm reach,

130mm drop, Ø31.8mm, 47 - 50cm: 420/450mm,

47 - 53cm: 90mm. 55cm: 100mm.

57cm: 110mm, 60cm: 120mm

53 - 60cm: 440 / 470mm

construction, ControlTaper 1.125" - 1.5" aluminum

steerer tube, carbon fiber blades, LR fender mounts,

SIZES

47, 50, 53, 55, 57, 60cm

GRIPS Felt CxGel tape with Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS Shimano RS405 10-speed

FRONT DERAILLEUR Shimano Tiagra clamp-on, Ø34.9mm

REAR DERAILLEUR Shimano Tiagra 10-speed long cage

CRANKSET Shimano FC-R460, 46/36T, 47cm: 165mm, 50 - 53cm: 172.5mm, 55 - 60cm: 175mm

BOTTOM BRACKET Shimano Hollowtech BSA threaded

CHAIN KMC X-10, 10-speed

FREEWHEEL/CASSETTE Shimano 10-speed, 11-34T

BRAKE LEVERS Shimano RS405, hydraulic

WEIGHT 23.0lbs, 10.4Kg

FRONT BRAKE Shimano RS405 hydraulic disc with 140mm rotor

REAR BRAKE Shimano RS405 hydraulic disc with 140mm rotor

SADDLE Felt CxR

SEATPOST Felt CxR3, Ø27.2mm x 300mm length

SEATPOST CLAMP Felt single bolt, Ø30.6mm

RIMS/WHEELSET Felt CxR3 Disc, tubeless ready, 17mm inner width, 22mm depth

FRONT HUB Felt R3 Disc, sealed cartridge bearing, 100 x 12mm thru axle, Center Lock, 32H

REAR HUB Felt R3 Disc, sealed cartridge bearing, 10-speed(11-speed compatible), QR, 32H

SPOKES 2.0mm stainless steel

TIRES Schwalbe Rapid Rob K-Guard, 700 x 35c

FFRD X Frameset F24X



FINISH

Matte Fluoro Red (Black)

FRAME Felt Cyclocross FLite custom butted aluminum, TIG-welded construction, BSA threaded bottom bracket shell, replaceable rear derailleur hanger

FORK Felt Cyclocross tapered aluminum blades, crown and dropouts, 1.125" Cr-Mo steerer tube

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap and aluminum bolt, IS-3E, 1.125"

STEM Felt SuperLite, ±7° rise, Ø26.0mm, 80mm

HANDLEBAR Felt K:1, 75mm reach, 120mm drop, Ø26.0mm, 360mm

GRIPS Felt CxGel tape with Felt Bubble-Tech F-Wing bar end plugs

SHIFTERS microSHIFT Road short reach 9-speed

SIZES 39cm

FRONT DERAILLEUR microSHIFT Road clamp-on,

REAR DERAILLEUR Shimano Sora 9-speed short cage

CRANKSET Felt CxR:K Road, 40/28T, 155mm

BOTTOM BRACKET Sealed cartridge, BSA threaded, square taper axle, 68 x 113mm

CHAIN KMC 9-speed

FREEWHEEL/CASSETTE Shimano 9-speed,

BRAKE LEVERS microSHIFT road short reach with Tektro top mount levers

FRONT BRAKE Mini V-Brake

REAR BRAKE Mini V-Brake

WEIGHT

20.9lbs, 9.4Kg



SADDLE Felt CxR:K

SEATPOST Felt CxR3, Ø27.2mm

SEATPOST CLAMP Felt single bolt, Ø31.8mm

RIMS/WHEELSET Felt CxR24, 22mm inner width,

FRONT HUB Felt R4, sealed cartridge bearing, 100mm QR, 24H

REAR HUB Felt R4, sealed bearing cartridge, 9-speed, 135mm QR, 24H

SPOKES 1.8mm stainless steel

TIRES Kenda Happy Medium, 24 x 1.125"



FINISH

Matte TeXtreme (White)

47, 50, 53, 55, 57, 60cm

WEIGHT 3.6lbs, 1.6Kg



FRAME Felt Cyclocross UHC Ultimate + TeXtreme carbon fiber, MMC with InsideOut construction, BB386 bottom bracket shell, 12 x 142mm Syntace style thru axle, shoulder friendly top tube, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical or electronic cable routing, 27.2mm seat post size

FORK Felt Cyclocross UHC Ultimate + TeXtreme carbon fiber monocoque construction, ControlTaper 1.125" - 1.5" carbon fiber steerer tube, integrated crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, No.42, 1.125 - 1.5"

SEATPOST CLAMP Felt single bolt, Ø31.8mm

ACCESSORIES Carbon assembly paste, chain plate protector, FSA headset, Felt seat clamp, front and rear thru axles



FINISH

Matte TeXtreme (Anthracite, White)

SIZES 47, 50, 53, 55, 57, 60cm

WEIGHT




FRAME Felt Cyclocross UHC Advanced + TeXtreme carbon fiber, MMC with InsideOut construction, BB386 bottom bracket shell, 12 x 142mm Syntace style thru axle, shoulder friendly top tube, flat mount disc brake standard, replaceable rear derailleur hanger, internal mechanical or electronic cable routing, 27.2mm seat post size

FORK Felt Cyclocross UHC Ultimate + TeXtreme carbon fiber monocoque construction, ControlTaper 1.125" - 1.5" carbon fiber steerer tube, integrated crown, and blades, flat mount disc standard, 12 x 100mm thru axle

HEADSET FSA integrated sealed cartridge bearing with Felt VariableHeight Cone Spacers (20mm PC, 4.5mm aluminum), Felt top cap, No.42, 1.125 - 1.5"

SEATPOST CLAMP Felt single bolt, Ø31.8mm

ACCESSORIES Carbon assembly paste, chain plate protector, FSA headset, Felt seat clamp, front and rear thru axles

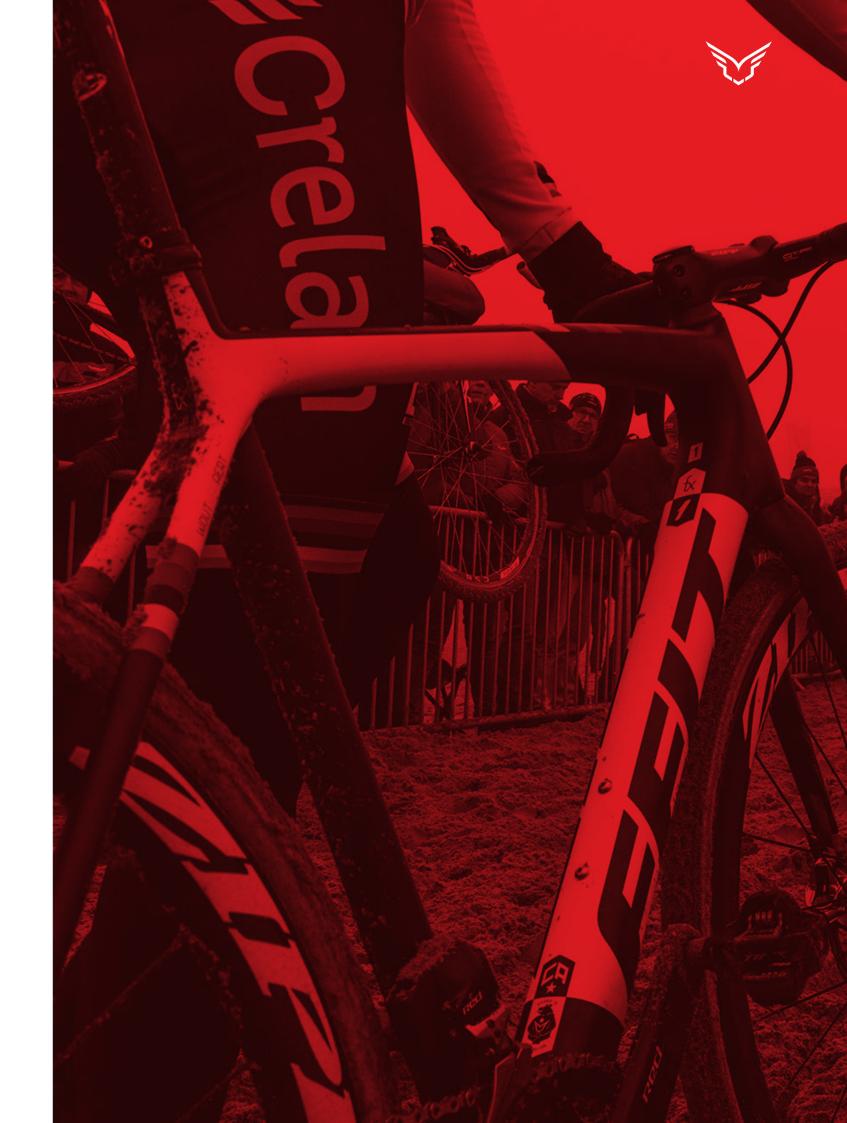

AR SERIES						
GEOMETRY	48	51	54	56	58	61
НА	71	72.5	73	73.5	74	74
SA	74.5	74	73.5	73.5	73.5	73
TT HORIZ	510	530	545	560	580	605
HT LENGTH	110	120	140	160	180	210
SEAT TUBE C-T	440	470	500	520	550	590
BB DROP	72	70	70	70	70	70
CS	408	408	410	410	410	410
FRONT CENTER	577	579	580	588	603	622
WHEELBASE	974	977	980	988	1003	1024
STANDOVER	710	740	764	785	812	845
RAKE	52	50	45	43	43	43
REACH	367	379	383	392	406	417
STACK	510	523	546	567	588	617

FR SERIES							
GEOMETRY	43	47	51	54	56	58	61
НА	70.5	71.5	72.25	73	73.5	73.75	74
SA	75.25	74.5	74	73.5	73.5	73.25	73
TT HORIZ	495	512	530	548	563	583	604
HT LENGTH	90	100	115	135	155	177	205
SEAT TUBE C-T	405	425	465	505	525	555	595
BB DROP	72	72	72	70	70	70	70
CS	403	403	403	405	405	407	410
FRONT CENTER	573	575	577	585	591	606	621
WHEELBASE	965	967	969	980	986	1003	1021
STANDOVER	657	676	710	747	767	790	828
RAKE	52	52	47	47	43	43	43
REACH	362	369	377	385	394	405	414
STACK	499	512	530	550	572	594	621

i4	56	58	61
'3	73.5	73.75	74
3.5	73.5	73.25	73
48	563	583	604
35	155	177	205
05	525	555	595
0	70	70	70
05	405	407	410
85	591	606	621
80	986	1003	1021
47	767	790	828
7	43	43	43
85	394	405	414
50	572	594	621

VRW 30, 40								VRW 50, 60							
GEOMETRY	61	47	51	54	56	58	61	GEOMETRY	43	47	51	54	56	58	61
НА	72.5	71.3	72	72.5	72.5	72.5	72.5	НА	70.3	71.3	72	72.5	72.5	72.5	72.5
SA	73	74.7	74.5	74	73.5	73	73	SA	75.3	74.7	74.5	74	73.5	73	73
TT HORIZ	595	510	525	545	563	580	595	TT HORIZ	495	510	525	545	563	580	595
HT LENGTH	225	130	145	165	185	205	225	HT LENGTH	115	130	145	165	185	205	225
SEAT TUBE C-T	550	430	450	480	500	520	550	SEAT TUBE C-T	410	430	450	480	500	520	550
BB DROP	70	74	72	72	72	72	72	BB DROP	74	74	72	72	72	72	72
CS	417	415	417	417	417	417	417	CS	415	415	417	417	417	417	417
FRONT CENTER	635	580	584	595	608	620	635	FRONT CENTER	576	580	584	595	608	620	635
WHEELBASE	1042	984	990	1001	1014	1026	1041	WHEELBASE	980	984	990	1001	1014	1026	1041
STANDOVER	805	689	709	737	757	776	803	STANDOVER	672	689	709	737	757	776	803
RAKE	50	52	50	50	50	50	50	RAKE	52	52	50	50	50	50	50
REACH	401	362	369	379	386	391	401	REACH	355	362	369	379	386	391	401
STACK	633	541	557	578	597	616	635	STACK	523	541	557	578	597	616	635

GEOMETRY	43	47	51	54	56	58	61
НА	70.5	71.5	72.25	73	73.5	73.75	74
SA	75.25	74.5	74	73.5	73.5	73.25	73
TT HORIZ	495	512	530	548	563	583	604
HT LENGTH	90	100	115	135	155	175	205
SEAT TUBE C-T	405	425	465	505	525	555	595
BB DROP	72	72	72	70	70	70	70
CS	407	407	407	407	407	410	410
FRONT CENTER	574	577	578	585	591	606	621
WHEELBASE	971	973	975	982	988	1006	1021
STANDOVER	657	676	710	747	767	790	828
RAKE	52	52	47	47	43	43	43
REACH	364	370	378	385	394	405	414
STACK	499	512	530	550	572	592	621

FR 50, 60							
GEOMETRY	43	47	51	54	56	58	61
НА	70.5	71.5	72.25	73	73.5	73.75	74
SA	75.25	74.5	74	73.5	73.5	73.25	73
TT HORIZ	495	512	530	548	563	583	604
HT LENGTH	100	110	125	145	165	185	215
SEAT TUBE C-T	405	425	465	505	525	555	595
BB DROP	72	72	72	70	70	70	70
CS	407	407	407	407	407	410	410
FRONT CENTER	574	577	584	583	593	608	623
WHEELBASE	971	973	980	980	990	1008	1023
STANDOVER	657	676	710	747	767	790	828
RAKE	52	52	52	45	45	45	45
REACH	364	370	378	385	394	405	414
STACK	499	512	529	550	571	591	621

GEOMETRY	51	54	56	58
НА	72.5	73	73	73
SA	76-78.1	76-78	76-78	76-78
TT HORIZ	500-520	521-540	541-560	561-580
HT LENGTH	80	88	108	128
SEAT TUBE C-T	510	540	560	580
BB DROP	70	70	70	70
CS	395	395	395	395
FRONT CENTER	577	593	614	635
WHEELBASE	962	978	999	1020
STANDOVER	770	794	813	833
RAKE	40	40	40	40
REACH	399	416	432	447
STACK	488	497	516	536

B SERIES						
GEOMETRY	47 (650c)	51	54	56	58	61
HA	71	72.5	73	73	73	73
SA	76.5	76	76	76	76	76
TT HORIZ	490	518	539	559	579	594
HT LENGTH	115	115	127	147	167	198
SEAT TUBE C-T	470	510	540	560	580	610
BB DROP	45	70	70	70	70	70
CS	375	395	395	395	395	395
FRONT CENTER	565	577	593	614	635	652
WHEELBASE	935	961	978	999	1020	1037
STANDOVER	703	743	764	779	780	780
RAKE	40	40	40	40	40	40
REACH	375	388	405	420	436	444
STACK	468	521	535	554	573	602

FRW SERIES					
GEOMETRY	43	47	51	54	56
НА	70.5	71.5	72.25	73	73.5
SA	75.25	74.5	74	73.5	73.5
TT HORIZ	495	512	530	548	563
HT LENGTH	90	100	115	135	155
SEAT TUBE C-T	405	425	465	505	525
BB DROP	72	72	72	70	70
CS	403	403	403	405	405
FRONT CENTER	573	575	577	585	591
WHEELBASE	965	967	969	980	986
STANDOVER	657	676	710	747	767
RAKE	52	52	47	47	43
REACH	362	369	377	385	394
STACK	499	512	530	550	572

FRW 30, 40					
GEOMETRY	43	47	51	54	56
НА	70.5	71.5	72.25	73	73.5
SA	75.25	74.5	74	73.5	73.5
TT HORIZ	495	512	530	548	563
HT LENGTH	90	100	115	135	155
SEAT TUBE C-T	405	425	465	505	525
BB DROP	72	72	72	70	70
CS	407	407	407	407	407
FRONT CENTER	574	577	578	585	591
WHEELBASE	971	973	975	982	988
STANDOVER	657	676	710	747	767
RAKE	52	52	47	47	43
REACH	364	370	378	385	394
STACK	499	512	530	550	572

\$32								
GEOMETRY	47 (650c)	51	54	56	58	61		
НА	71	72	72.5	72.5	72.5	72.5		
SA	78.8	78	78	78	78	78		
TT HORIZ	466	496	518	538	558	570		
HT LENGTH	120	120	130	150	170	190		
SEAT TUBE C-T	470	510	540	560	580	610		
BB DROP	45	70	70	70	70	70		
CS	375	395	395	395	395	395		
FRONT CENTER	565	582	599	621	643	657		
WHEELBASE	935	967	984	1006	1028	1042		
STANDOVER	-	743	764	779	780	780		
RAKE	41	43	43	43	43	43		
REACH	373	385	403	419	435	444		
STACK	472	524	535	554	573	592		

TK 1				
GEOMETRY	52	55	57	60
НА	73	73.5	74	74.5
SA	74	74	74	73.5
TT HORIZ	530	550	570	600
HT LENGTH	80	90	110	135
SEAT TUBE C-T	505	525	545	570
BB DROP	55	55	55	55
CS	375	375	375	375
FRONT CENTER	566	582	598	619
WHEELBASE	935	950	967	987
STANDOVER	745	754	774	800
RAKE	40	40	40	40
REACH	395	412	426	444
STACK	469	480	501	527
RAKE REACH	40 395	40 412	40 426	40 444

FRW 50, 60								
GEOMETRY	43	47	51	54	56			
НА	70.5	71.5	72.25	73	73.5			
SA	75.25	74.5	74	73.5	73.5			
TT HORIZ	495	512	530	548	563			
HT LENGTH	100	110	125	145	155			
SEAT TUBE C-T	405	425	465	505	525			
BB DROP	72	72	72	70	70			
CS	407	407	407	407	407			
FRONT CENTER	574	577	584	583	591			
WHEELBASE	971	973	980	980	988			
STANDOVER	657	676	710	747	767			
RAKE	52	52	52	45	43			
REACH	364	370	378	385	394			
STACK	499	512	529	550	572			

VR SERIES							
GEOMETRY	43	47	51	54	56	58	61
НА	70.3	71.3	72	72.5	72.5	72.5	72.5
SA	75.3	74.7	74.5	74	73.5	73	73
TT HORIZ	495	510	525	545	563	580	595
HT LENGTH	115	130	145	165	185	205	225
SEAT TUBE C-T	410	430	450	480	500	520	550
BB DROP	72	72	70	70	70	70	70
CS	412	412	415	415	415	417	417
FRONT CENTER	576	580	583	595	608	620	635
WHEELBASE	977	981	989	1000	1013	1027	1042
STANDOVER	665	687	708	737	757	777	805
RAKE	52	52	50	50	50	50	50
REACH	355	363	369	379	386	392	401
STACK	521	539	555	576	595	614	633

TK 2, 3							
GEOMETRY	43 (650c)	51	54	56	58	61	
НА	71.5	74	75	75	75	75	
SA	76	74	74	74	74	74	
TT HORIZ	475	515	540	560	580	607	
HT LENGTH	90	110	120	140	160	195	
SEAT TUBE C-T	430	510	540	560	580	610	
BB DROP	33	55	55	55	55	55	
CS	374	395	395	395	395	395	
FRONT CENTER	543	547	550	569	589	615	
WHEELBASE	914	935	938	958	978	1004	
STANDOVER	-	-	-	-	-	-	
RAKE	41	43	30	30	30	30	
REACH	365	372	392	406	421	438	
STACK	433	501	517	536	555	589	

FX SERIES								
GEOMETRY	47	50	53	55	57	60		
НА	70.5	70.5	71	72	72	72		
SA	75.5	74.5	73.5	73.5	73.5	73.5		
TT HORIZ	515	530	545	565	580	600		
HT LENGTH	110	120	130	150	170	190		
SEAT TUBE C-T	470	500	530	550	570	590		
BB DROP	65	65	65	65	65	65		
CS	430	430	430	430	430	430		
FRONT CENTER	599	604	605	611	626	647		
WHEELBASE	1022	1028	1029	1033	1048	1068		
STANDOVER	726	750	775	796	815	834		
RAKE	50	50	50	45	45	45		
REACH	380	382	384	397	406	420		
STACK	523	533	544	568	587	607		

